
Data sheet

L68936HL - Flex Strip 800 HE+ Mono - UWW

Article name: Flex Strip 800 HE+ Mono - UWW

Article number: L68936HL



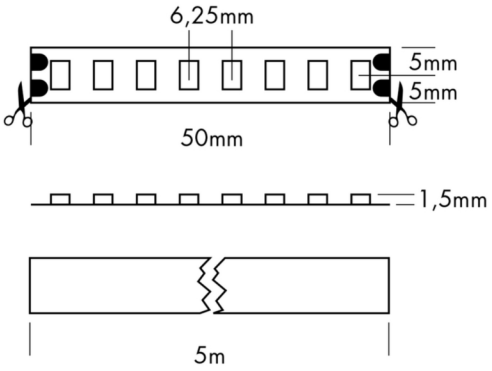

Article description:

The PROLED FLEX STRIPS are perfect for indirect lightning, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities.

- High efficiency (110 - 130 Lumen per Watt)
- High flexibility - adaptable to round shapes.
- Installation with 3M adhesive tape on the strip's backside (self adhesive)
- dimmable and controllable via DMX 512, DALI, KNX, 1-10V, CASAMBI, RF by MULTI power supplies/controller

Technical:

Mounting type:	Surface-mounted on ceiling	**Electric:**	
Adjustability:	Fixed	System power:	20 W
Controllability:	Dimmable	Current:	24 V
Safety:	IP20	Safety class:	3
Temperature range:	-10...45 °C	EEI:	A++ - A
Lifetime:	50.000 h at L80B10	UGR:	29.12

Shape and dimensions:

Length:	1000 mm
Width:	10 mm
Height:	2 mm
Weight:	-

Status 08.12.2020 Technical amendments and errors reserved.


PROLED ®
MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany
Phone +49.821.60099-0 | Fax +49.821.60099-99
info@proled.com | proled.com


Data sheet

L68936HL - Flex Strip 800 HE+ Mono - UWW

Light output 1 (LED 2400K - CRI 90):

Lamp type:	LED
Lamp power:	20 W
Total luminous flux:	2200 lm
Light efficiency:	110 lm/W
CCT:	2400 K
CRI:	90
Light distribution:	(Symmetrical) Wide flood (half value angle 45°…125°)

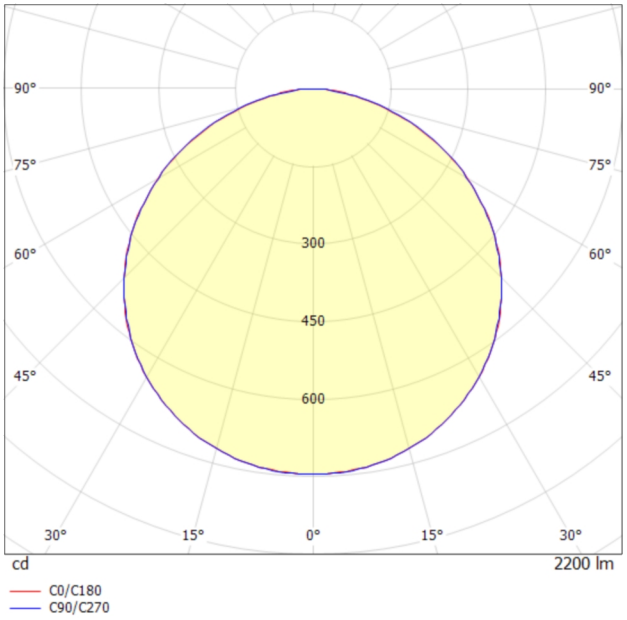

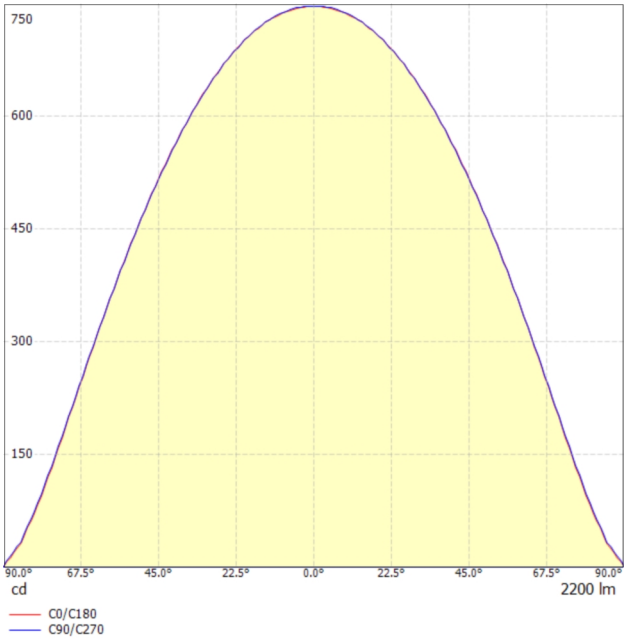


Status 08.12.2020

Technical amendments and errors reserved.

PROLED ®
MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany
Phone +49.821.60099-0 | Fax +49.821.60099-99
info@proled.com | proled.com

Data sheet

L68936HL - Flex Strip 800 HE+ Mono - UWW

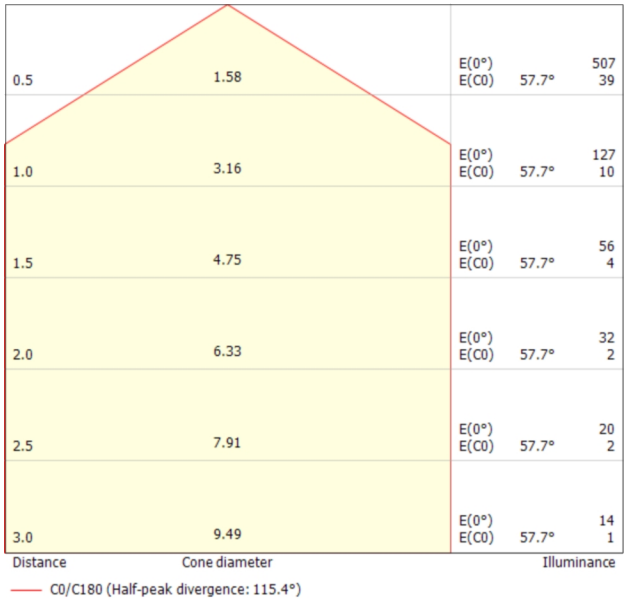

Glare evaluation according to UGR

ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	25.3	26.6	25.6	26.8	27.1	25.3	26.6	25.6	26.8	27.1
2H	3H	26.8	28.0	27.2	28.3	28.6	26.8	28.1	27.2	28.3	28.6
2H	4H	27.4	28.6	27.8	28.9	29.2	27.5	28.6	27.8	28.9	29.2
2H	6H	27.8	28.9	28.2	29.2	29.5	27.9	28.9	28.2	29.2	29.6
2H	8H	28.0	29.0	28.3	29.3	29.6	28.0	29.0	28.4	29.3	29.7
2H	12H	28.0	29.0	28.4	29.3	29.7	28.1	29.0	28.5	29.4	29.7
4H	2H	26.0	27.1	26.3	27.4	27.7	26.0	27.1	26.3	27.4	27.7
4H	3H	27.7	28.7	28.1	29.0	29.4	27.7	28.7	28.1	29.0	29.4
4H	4H	28.4	29.3	28.8	29.6	30.0	28.5	29.3	28.9	29.7	30.0
4H	6H	28.9	29.7	29.4	30.1	30.5	29.0	29.7	29.4	30.1	30.5
4H	8H	29.1	29.8	29.6	30.2	30.6	29.2	29.9	29.6	30.3	30.7
4H	12H	29.2	29.8	29.7	30.3	30.7	29.3	29.9	29.7	30.3	30.8
8H	4H	28.7	29.4	29.2	29.8	30.2	28.7	29.4	29.2	29.8	30.3
8H	6H	29.4	29.9	29.8	30.4	30.8	29.4	30.0	29.9	30.4	30.9
8H	8H	29.6	30.1	30.1	30.6	31.0	29.7	30.1	30.1	30.6	31.1
8H	12H	29.8	30.2	30.3	30.7	31.2	29.8	30.2	30.3	30.7	31.2
12H	4H	28.7	29.4	29.2	29.8	30.2	28.8	29.4	29.2	29.8	30.2
12H	6H	29.4	29.9	29.9	30.4	30.9	29.5	30.0	29.9	30.4	30.9
12H	8H	29.7	30.1	30.2	30.6	31.1	29.7	30.2	30.2	30.6	31.1

Variation of the observer position for the luminaire distances S

S = 1.0H S = 1.5H S = 2.0H	+0.1 / -0.1 +0.2 / -0.3 +0.4 / -0.7	+0.1 / -0.1 +0.2 / -0.3 +0.4 / -0.7
Standard table	BK06	BK06
Correction summand	12.5	12.5

Correction glare indices referring to 2200lm total luminous flux

Status 08.12.2020

Technical amendments and errors reserved.

PROLED ®
MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany
Phone +49.821.60099-0 | Fax +49.821.60099-99
info@proled.com | proled.com