


Article name: Flex Strip 300-95 Mono - NW

Article number: L62908

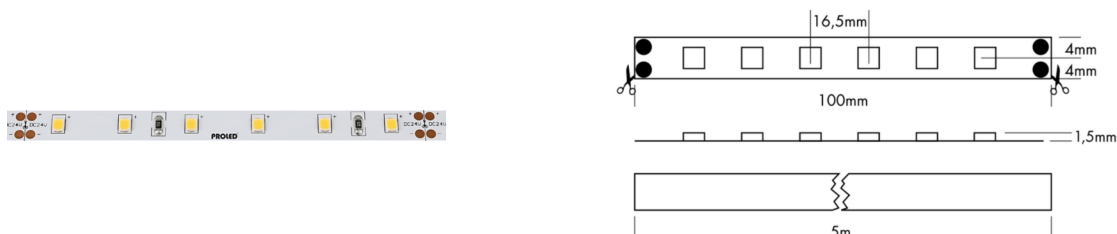

Article description:

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities.

- High flexibility - adaptable to round shapes.
- Installation with 3M adhesive tape on the strip's backside (self adhesive).
- dimmable and controllable via DMX 512, DALI, KNX, 1-10V, CASAMBI, RF by MULTI power supplies/controller

Technical:

Mounting type: Surface-mounted on ceiling

Adjustability: Fixed

Controllability: Dimmable

Safety: IP20

Temperature range: -10...45 °C

Lifetime: 50.000 h at L80B10

Electric:

System power: 4.8 W

Current: 24 V

Safety class: 3

EEL: A++ - A

UGR: 28.94

Shape and dimensions:

Length: 1000 mm



Width: 8 mm

Height: 2 mm

Weight: -


Light output 1 (LED 4000K - CRI 95):

Lamp type:	LED
Lamp power:	4.8 W
Total luminous flux:	440 lm
Light efficiency:	91.7 lm/W
CCT:	4000 K
CRI:	95
Light distribution:	(Symmetrical) Wide flood (half value angle 45°...125°)

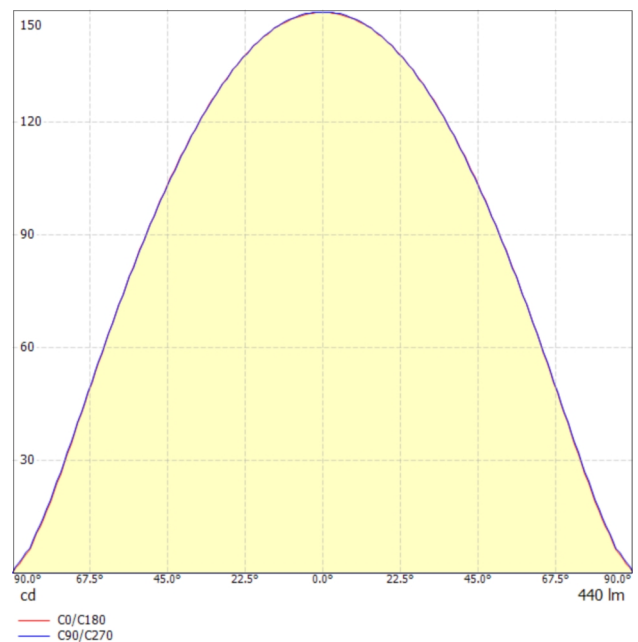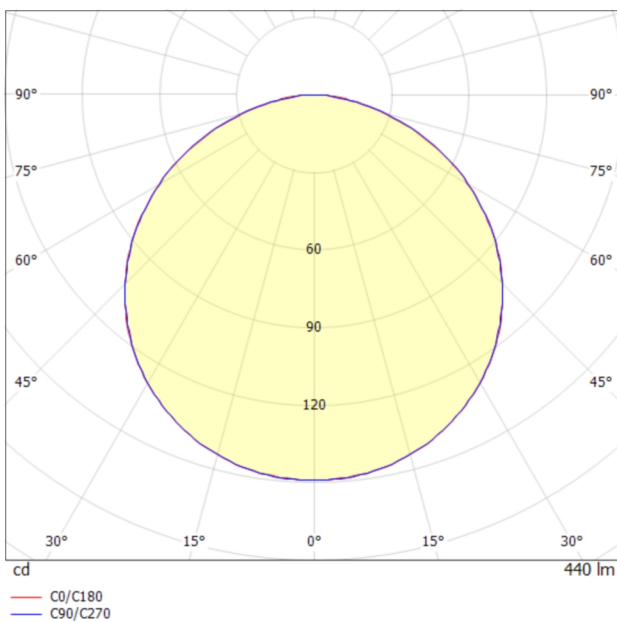

Data sheet

L62908 - Flex Strip 300-95 Mono - NW

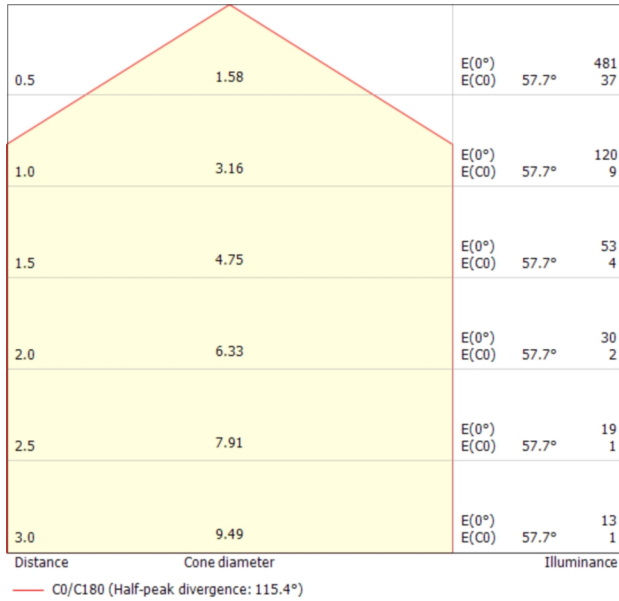

Glare evaluation according to UGR

p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20
Room size X Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H 2H	25.1	26.4	25.4	26.7	26.9	25.1	26.4	25.4	26.7	26.9
2H 3H	26.7	27.9	27.0	28.1	28.4	26.7	27.9	27.0	28.1	28.4
2H 4H	27.3	28.4	27.6	28.7	29.0	27.3	28.4	27.6	28.7	29.0
2H 6H	27.7	28.7	28.0	29.0	29.3	27.7	28.8	28.1	29.1	29.4
2H 8H	27.8	28.8	28.2	29.1	29.4	27.8	28.8	28.2	29.2	29.5
2H 12H	27.8	28.8	28.2	29.1	29.5	27.9	28.9	28.3	29.2	29.5
4H 2H	25.8	26.9	26.1	27.2	27.5	25.8	26.9	26.1	27.2	27.5
4H 3H	27.5	28.5	27.9	28.8	29.2	27.5	28.5	27.9	28.8	29.2
4H 4H	28.3	29.1	28.7	29.5	29.8	28.3	29.1	28.7	29.5	29.9
4H 6H	28.8	29.5	29.2	29.9	30.3	28.8	29.6	29.2	29.9	30.4
4H 8H	28.9	29.6	29.4	30.0	30.5	29.0	29.7	29.4	30.1	30.5
4H 12H	29.0	29.7	29.5	30.1	30.5	29.1	29.7	29.6	30.1	30.6
8H 4H	28.5	29.2	29.0	29.6	30.1	28.6	29.3	29.0	29.7	30.1
8H 6H	29.2	29.8	29.7	30.2	30.7	29.2	29.8	29.7	30.2	30.7
8H 8H	29.4	29.9	29.9	30.4	30.9	29.5	30.0	30.0	30.4	30.9
8H 12H	29.6	30.0	30.1	30.5	31.0	29.6	30.1	30.1	30.5	31.1
12H 4H	28.6	29.2	29.0	29.6	30.0	28.6	29.2	29.0	29.6	30.1
12H 6H	29.2	29.7	29.7	30.2	30.7	29.3	29.8	29.8	30.2	30.7
12H 8H	29.5	29.9	30.0	30.4	30.9	29.6	30.0	30.1	30.5	31.0
Variation of the observer position for the luminaire distances S										
S = 1.0H	+0.1 / -0.1					+0.1 / -0.1				
S = 1.5H	+0.2 / -0.3					+0.2 / -0.3				
S = 2.0H	+0.4 / -0.7					+0.4 / -0.7				
Standard table	BK06					BK06				
Correction summand	12.3					12.3				
Correction glare indices referring to 440lm total luminous flux										

Status 08.12.2020

Technical amendments and errors reserved.

PROLED ®

MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

info@proled.com | proled.com