


**Special features**

- Robust housing
- Flicker-free
- Secured against short circuits and overloads
- Overheating protection

Housing Material	Aluminium
Housing Color	Grey
Functions	Short-circuit proof, Lamp control gear 110, Furniture installation, Protective extra-low voltage, Overloading protection, Overtemperature protection
Operating Mode	Constant voltage
Protection Class	Protection class I/protective grounding
Rated Input Voltage Frequency	100-240 V/AC 50 / 60 Hz
Power	240 W
Output Voltage	24 V/DC
Output Current	0-10000 mA
Power Factor	0.95
Primary Connection	With free strand / conductor ends
Secondary Connection	Open cables
Max. units per MCB B10	2
Max. units per MCB B16	3
Max. units per MCB C10	4
Max. units per MCB C16	7
Inrush Current max.	70 A / 300 μ s
Capacitive Load	626.3 nF
Reference Point Tc	80 °C
Working Temperature	-20 to 50 °C
Storage Temperature	-20 to 70 °C
IP Protection Class	IP 67
Life Time	50000 h
Length	249 mm
Width	72 mm
Height	40 mm
Product weight	1247 g

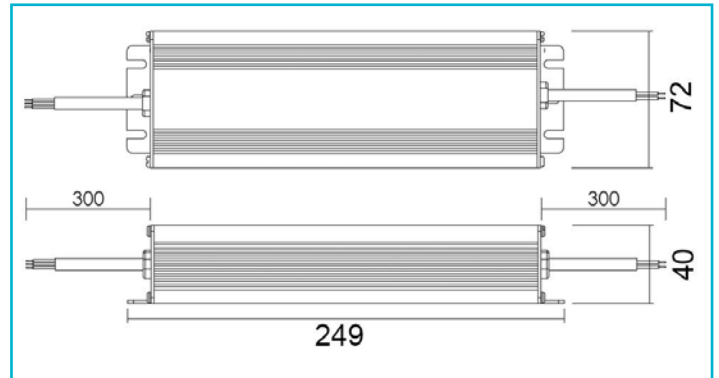