



Data sheet

L64804 - Flex Strip Side View Mono - W

PROLED®

Article name: Flex Strip Side View Mono - W

Article number: L64804

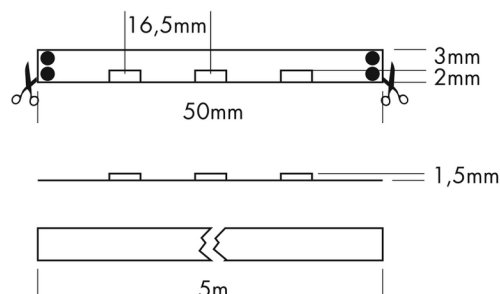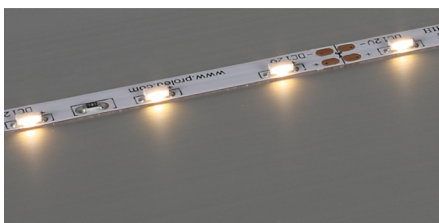

Article description:

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities.

- High flexibility - adaptable to round shapes.
- Installation with 3M adhesive tape on the strip's backside (self adhesive)
- LEDs side emission of light
- dimmable and controllable via DMX 512, DALI, KNX, 1-10V, CASAMBI, RF by MULTI power supplies/controller

Technical:

Mounting type: Surface-mounted on ceiling

Adjustability: Fixed

Controllability: Dimmable

Safety: IP20

Temperature range: -10...45 °C

Lifetime: 50.000 h at L80B10

Electric:

System power: 4.8 W

Current: 12 V

Safety class: 3

EEL: A++ - A

UGR: 29.84

Shape and dimensions:

Length: 1000 mm

Width: 5 mm

Height: 2 mm

Weight: -

Status 08.12.2020

Technical amendments and errors reserved.

PROLED®



MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

info@proled.com | proled.com

Light output 1 (LED 5700K - CRI 80):

Lamp type:	LED
Lamp power:	4.8 W
Total luminous flux:	380 lm
Light efficiency:	79.2 lm/W
CCT:	5700 K
CRI:	80
Light distribution:	(Symmetrical) Wide flood (half value angle 45° ... 125°)

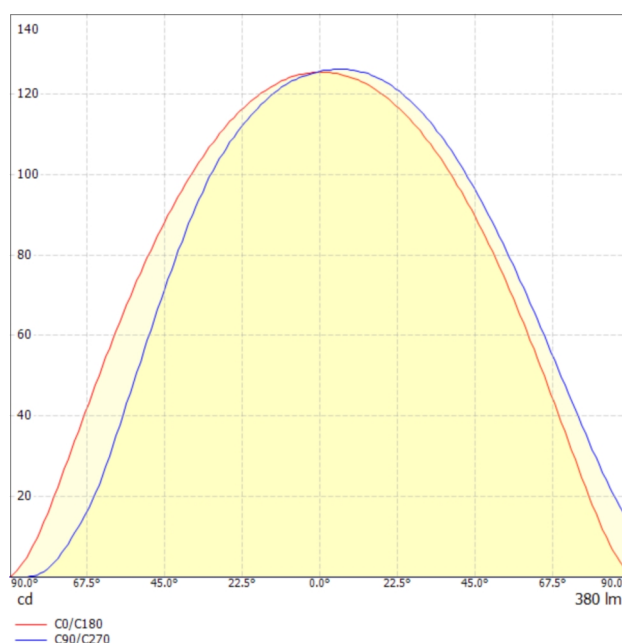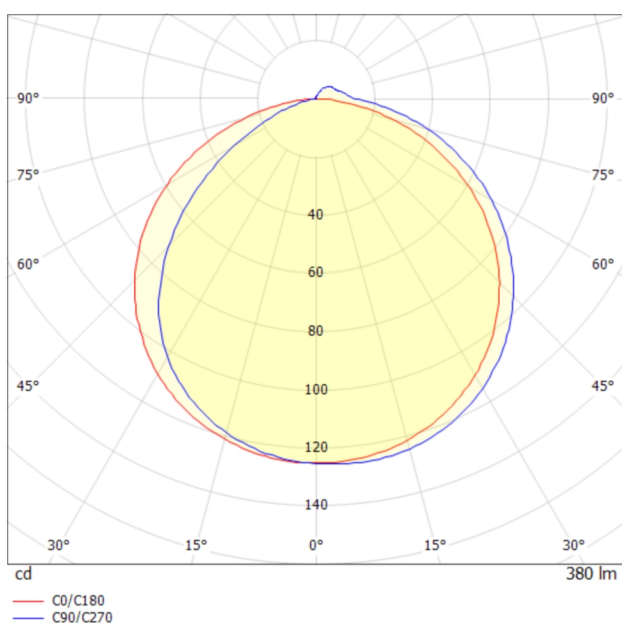

Data sheet

L64804 - Flex Strip Side View Mono - W

PROLED®

Status 08.12.2020

Technical amendments and errors reserved.

PROLED®

MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

info@proled.com | proled.com