

# Selecon

## STUDIO PANEL MKII



The Studio Panel MKII is a compact, lightweight LED luminaire designed for both studio and location use. Available with a high TLCI rating in tunable white 3200-5600K.

Requiring just 50 watts, these luminaires operate on AC or DC voltage. The battery power input allows location operation using industry standard batteries. Additional holographic diffuser accessories provide beam angle control with minimal light loss.

# Selecon

## STUDIO PANEL MKII

### FEATURES

- Compact lightweight design
- 50 degree beam angle
- 8- or 16-bit control from any DMX512-A control source
- Local rotary control for intensity
- Variable version features 9 built-in color temperature presets including 3200K and 5600K
- Variety of additional accessories
- Battery or mains operated
- Three year limited warranty

# Selecon

## STUDIO PANEL MKII

### SOURCE

Lamp	LED
Wattage (max)	30W

### OPTICAL PERFORMANCE

Color temperature	3200-5600K
TLCI	94
Beam angle	50°
Dimming	Local DMX 8 or 16-bit

### POWER

Operating voltage	100-240VAC 12-24VDC (battery)
Frequency	50 / 60Hz
Current draw	0.8A (max) @ 115V 0.4A (max) @ 230V
Power consumption	50W (max)

### ENVIRONMENT

°C

Ambient temperature	0-40 °C
Cooling	Natural convection
Humidity	5-95% non-condensing
IP rating	IP20

### PHYSICALS

IP rating	IP20
Finish	Black
Construction	Die-cast aluminium

### DIMENSIONS

mm

in

H x W x D	300 x 545 x 66	11.8 x 21.5 x 2.6
-----------	----------------	-------------------

### WEIGHT

kg

lb


Net weight	2.3	5
------------	-----	---

### WARRANTY AND APPROBATION


Warranty	3 years
Approvals	CE

# Selecon

## STUDIO PANEL MKII

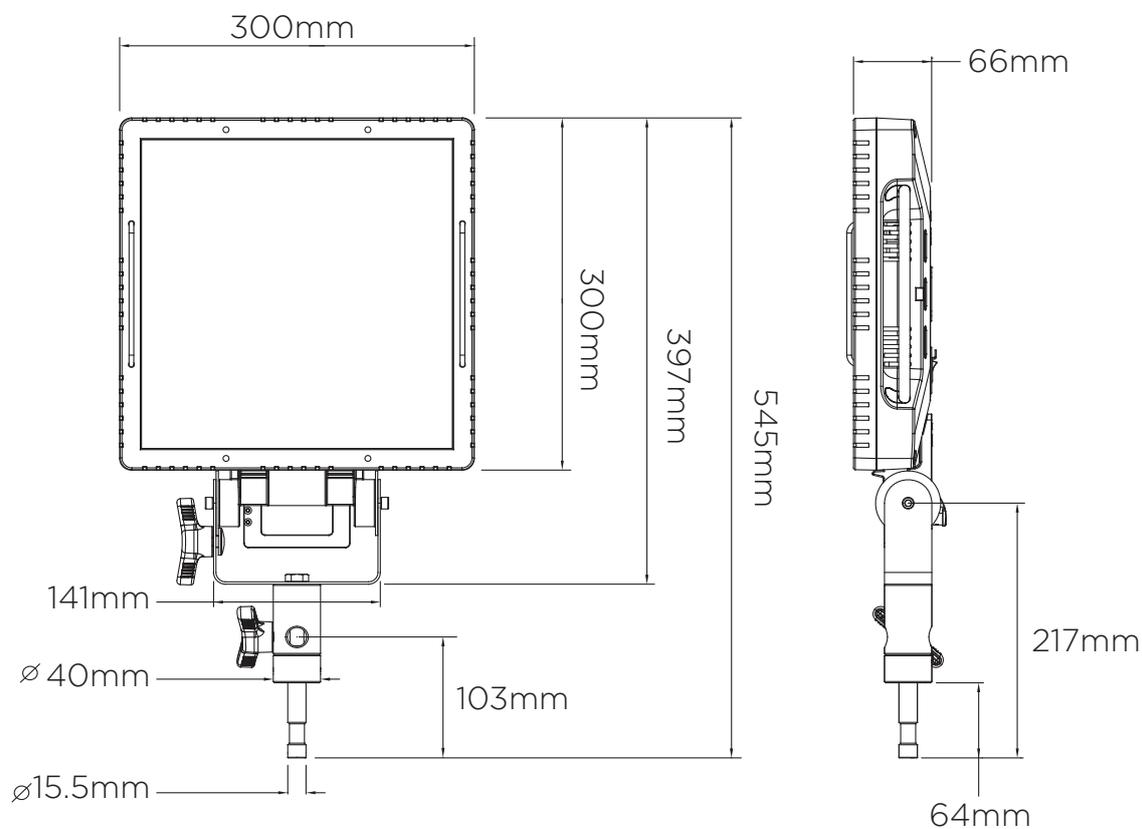

NOTE: Shown with supplied stud adapter installed.  
This adapter is removable.

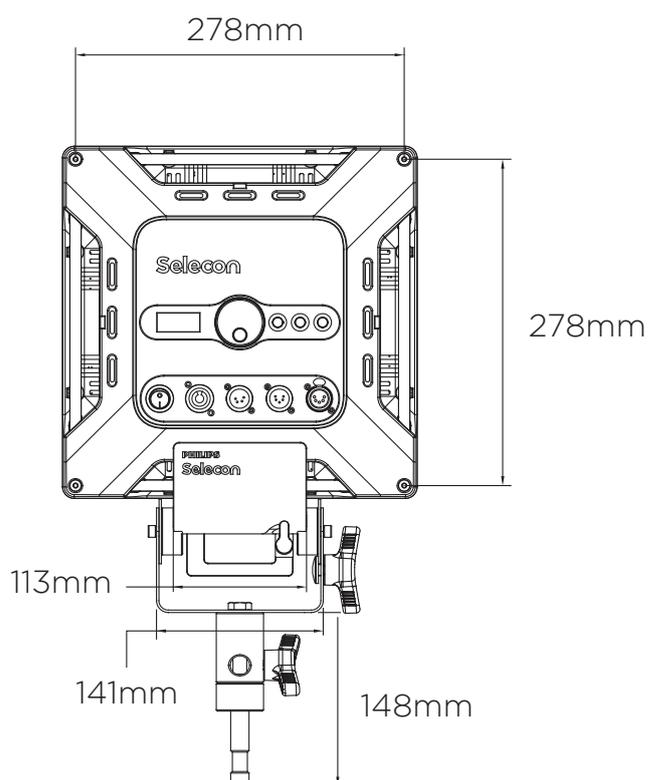

# Selecon

## STUDIO PANEL MKII

PRODUCT NAME	ORDER CODE
3200-5600K Studio Panel MKII*	PLSTUPNL-TW-03 MKII
ACCESSORIES	ORDER CODE
2 leaf snap on barndoor	PLSTUPNLBD
40° standard spread lens	PLSTUPNLL40
60° Standard spread lens	PLSTUPNLL60
Front mount accessory holder / adapter ring	PLSTUADPTRG
Pistol grip handle	PLSTUPGH
16mm (5/8in) female stud adapter	PLSTUPNLSAF
16mm (5/8in) male stud adapter	PLSTUPNLSAM
Anton Bauer Gold Series battery mount	PLSTUABBH
V-lock style battery mount*	PLSTUVLBH
INPUT CABLES**	ORDER CODE
1m AC input cable powerCON to bare ends	PC1BE
3m AC input cable powerCON to bare ends	PC3BE
8m AC input cable powerCON to bare ends	PC8BE

\* V-lock batteries sold by others.

© 2020 Signify Holding. All rights reserved.

All trademarks are owned by Signify Holding or their respective owners. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Data subject to change.

Ref: PLSTUPNL-TW-03 MKII-100-00