


Data sheet

L674808SHL - Flex Strip IP53 1200 HE+ Mono - NW

PROLED®

Article name: Flex Strip IP53 1200 HE+ Mono - NW

Article number: L674808SHL

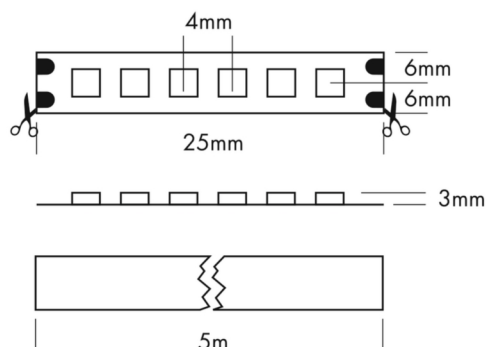

Article description:

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities.

- High efficiency
- High flexibility - adaptable to round shapes.
- Installation with 3M adhesive tape on the strip's backside (self adhesive)
- IP53 only if glued correctly and if the sides are sealed with glue.
- dimmable and controllable via DMX 512, DALI, KNX, 1-10V, CASAMBI, RF by MULTI power supplies/controller

Technical:

Mounting type: Surface-mounted on ceiling

Adjustability: Fixed

Controllability: Dimmable

Safety: IP53

Temperature range: -10...45 °C

Lifetime: 50.000 h at L80B10

Electric:

System power: 38 W

Current: 24 V

Safety class: 3

EEL: A++ - A

UGR: 37.59

Shape and dimensions:

Length: 1000 mm

Width: 12 mm

Height: 3 mm

Weight: -

Status 08.12.2020

Technical amendments and errors reserved.

PROLED®



MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

info@proled.com | proled.com

Light output 1 (LED 4000K - CRI 90):


Lamp type:	LED
Lamp power:	38 W
Total luminous flux:	3500 lm
Light efficiency:	92.1 lm/W
CCT:	4000 K
CRI:	90
Light distribution:	(Symmetrical) Wide flood (half value angle 45° ... 125°)

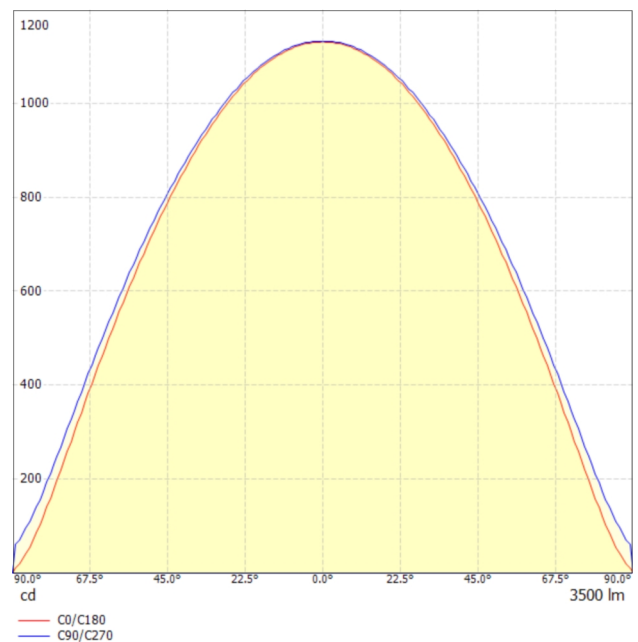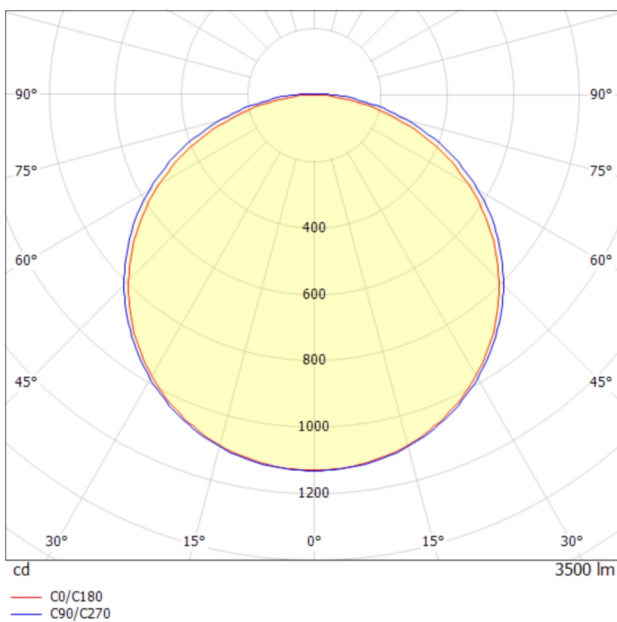

Data sheet

L674808SHL - Flex Strip IP53 1200 HE+ Mono - NW

PROLED®

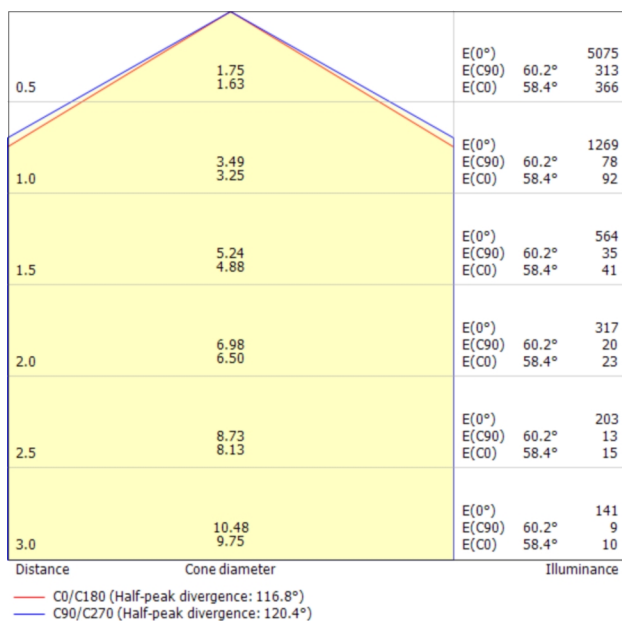

Glare evaluation according to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30
p Walls		50	30	50	30	30	50	30	50	30	30
p Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewing direction at					Viewing direction				
X	Y	right angles to lamp axis					parallel to lamp axis				
2H	2H	33.4	34.8	33.7	35.0	35.3	33.6	35.0	33.9	35.2	35.5
2H	3H	35.1	36.3	35.4	36.6	36.8	35.4	36.6	35.7	36.9	37.2
2H	4H	35.7	36.9	36.1	37.2	37.5	36.2	37.4	36.5	37.7	38.0
2H	6H	36.2	37.3	36.5	37.6	37.9	36.8	37.9	37.2	38.2	38.6
2H	8H	36.3	37.4	36.7	37.7	38.0	37.1	38.2	37.5	38.5	38.8
2H	12H	36.4	37.4	36.8	37.7	38.1	37.3	38.3	37.7	38.7	39.0
4H	2H	34.2	35.3	34.5	35.6	35.9	34.3	35.5	34.7	35.8	36.1
4H	3H	36.0	37.0	36.4	37.3	37.7	36.3	37.3	36.7	37.6	38.0
4H	4H	36.8	37.7	37.2	38.1	38.4	37.2	38.1	37.6	38.5	38.9
4H	6H	37.4	38.2	37.8	38.6	39.0	38.0	38.8	38.5	39.2	39.6
4H	8H	37.6	38.3	38.0	38.7	39.1	38.4	39.1	38.8	39.5	39.9
4H	12H	37.7	38.4	38.2	38.8	39.2	38.7	39.3	39.1	39.7	40.2
8H	4H	37.2	37.9	37.6	38.3	38.7	37.6	38.3	38.0	38.7	39.1
8H	6H	37.9	38.5	38.4	39.0	39.4	38.5	39.1	39.0	39.5	40.0
8H	8H	38.2	38.7	38.7	39.2	39.7	38.9	39.5	39.4	39.9	40.4
8H	12H	38.4	38.9	38.9	39.3	39.8	39.4	39.8	39.9	40.3	40.8
12H	4H	37.2	37.9	37.7	38.3	38.7	37.6	38.2	38.0	38.7	39.1
12H	6H	38.0	38.6	38.5	39.0	39.5	38.6	39.1	39.1	39.6	40.0
12H	8H	38.4	38.8	38.9	39.3	39.8	39.1	39.5	39.6	40.0	40.5
Variation of the observer position for the luminaire distances S											
S = 1.0H		+0.1 / -0.1					+0.1 / -0.1				
S = 1.5H		+0.2 / -0.3					+0.2 / -0.3				
S = 2.0H		+0.3 / -0.6					+0.3 / -0.5				
Standard table		BK06					BK07				
Correction summand		20.9					22.0				
Correction glare indices referring to 3500lm total luminous flux											

Status 08.12.2020

Technical amendments and errors reserved.

PROLED®

MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

info@proled.com | proled.com