


# Data sheet

L62836HL - Flex Strip 300 HE+ Mono - UWW

# PROLED®

Article name: Flex Strip 300 HE+ Mono - UWW

Article number: L62836HL

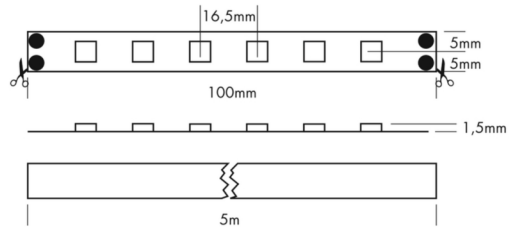

## Article description:

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities.

- High efficiency (100 Lumen per Watt)
- High flexibility - adaptable to round shapes.
- Installation with 3M adhesive tape on the strip's backside (self adhesive)
- dimmable and controllable via DMX 512, DALI, KNX, 1-10V, CASAMBI, RF by MULTI power supplies/controller

## Technical:

**Mounting type:** Surface-mounted on ceiling

**Adjustability:** Fixed

**Controllability:** Dimmable

**Safety:** IP20

**Temperature range:** -10...45 °C

**Lifetime:** 50.000 h at L80B10

### Electric:

System power: 9.6 W

Current: 24 V

Safety class: 3

EEL: A++ - A

UGR: 28.45

### Shape and dimensions:

Length: 1000 mm

Width: 10 mm

Height: 2 mm

Weight: -

Status 08.12.2020

Technical amendments and errors reserved.

PROLED®



MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

info@proled.com | proled.com

Light output 1 (LED 2700K - CRI 90):

Lamp type:	LED
Lamp power:	9.6 W
Total luminous flux:	950 lm
Light efficiency:	99 lm/W
CCT:	2400 K
CRI:	90
Light distribution:	(Symmetrical) Wide flood (half value angle 45° ... 125°)

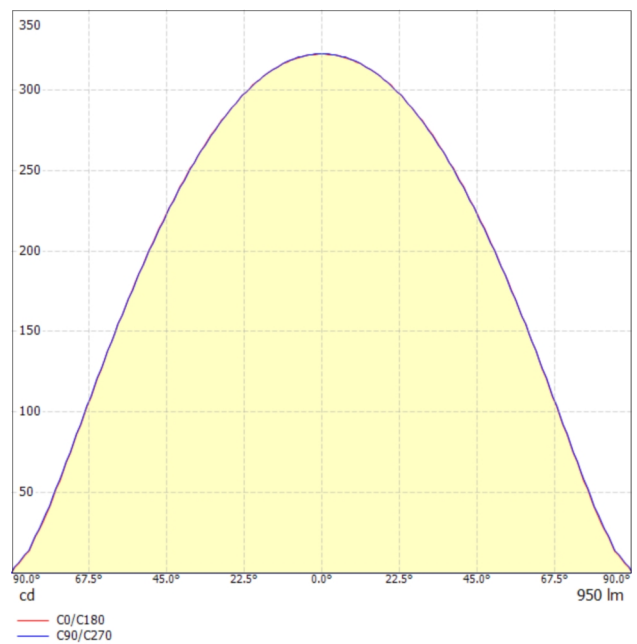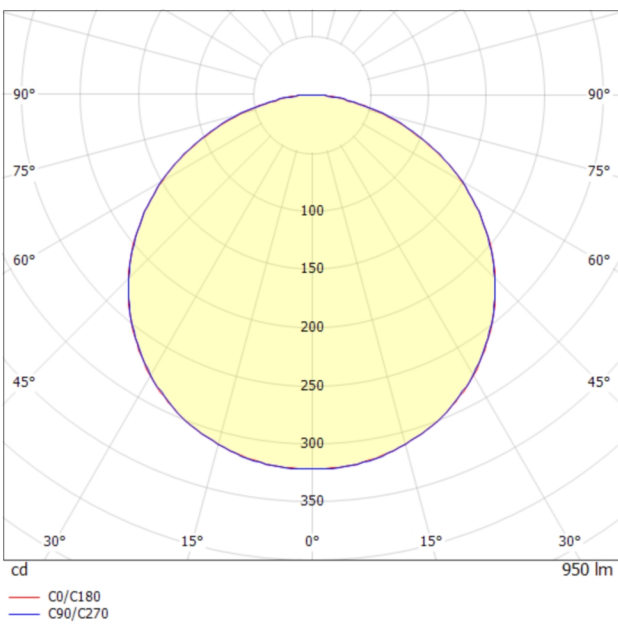

# Data sheet

L62836HL - Flex Strip 300 HE+ Mono - UWW



0.5	1.58	E(0°) E(C0)	57.7°	418 32
1.0	3.16	E(0°) E(C0)	57.7°	105 8
1.5	4.75	E(0°) E(C0)	57.7°	46 4
2.0	6.33	E(0°) E(C0)	57.7°	26 2
2.5	7.91	E(0°) E(C0)	57.7°	17 1
3.0	9.49	E(0°) E(C0)	57.7°	12 1

Distance                      Cone diameter                      Illuminance

— C0/C180 (Half-peak divergence: 115.4°)

## Glare evaluation according to UGR

p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20

Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
		2H	2H	24.6	25.9	24.9	26.2	26.4	24.6	25.9	24.9
2H	3H	26.2	27.4	26.5	27.6	27.9	26.2	27.4	26.5	27.7	27.9
2H	4H	26.8	27.9	27.1	28.2	28.5	26.8	27.9	27.1	28.2	28.5
2H	6H	27.2	28.2	27.5	28.5	28.9	27.2	28.3	27.6	28.6	28.9
2H	8H	27.3	28.3	27.7	28.6	29.0	27.3	28.4	27.7	28.7	29.0
2H	12H	27.4	28.3	27.7	28.7	29.0	27.4	28.4	27.8	28.7	29.1
4H	2H	25.3	26.4	25.6	26.7	27.0	25.3	26.4	25.6	26.7	27.0
4H	3H	27.0	28.0	27.4	28.3	28.7	27.0	28.0	27.4	28.4	28.7
4H	4H	27.8	28.6	28.2	29.0	29.4	27.8	28.6	28.2	29.0	29.4
4H	6H	28.3	29.0	28.7	29.4	29.8	28.3	29.1	28.7	29.5	29.9
4H	8H	28.4	29.1	28.9	29.5	30.0	28.5	29.2	28.9	29.6	30.0
4H	12H	28.5	29.2	29.0	29.6	30.0	28.6	29.2	29.1	29.6	30.1
8H	4H	28.1	28.7	28.5	29.1	29.6	28.1	28.8	28.5	29.2	29.6
8H	6H	28.7	29.3	29.2	29.7	30.2	28.7	29.3	29.2	29.7	30.2
8H	8H	28.9	29.4	29.4	29.9	30.4	29.0	29.5	29.5	29.9	30.4
8H	12H	29.1	29.5	29.6	30.0	30.5	29.2	29.6	29.7	30.1	30.6
12H	4H	28.1	28.7	28.5	29.1	29.6	28.1	28.7	28.5	29.1	29.6
12H	6H	28.8	29.2	29.2	29.7	30.2	28.8	29.3	29.3	29.7	30.2
12H	8H	29.0	29.4	29.5	29.9	30.4	29.1	29.5	29.6	30.0	30.5

Variation of the observer position for the luminaire distances S		
S = 1.0H	+0.1 / -0.1	+0.1 / -0.1
S = 1.5H	+0.2 / -0.3	+0.2 / -0.3
S = 2.0H	+0.4 / -0.7	+0.4 / -0.7

Standard table	BK06	BK06
Correction summand	11.8	11.8

Correction glare indices referring to 950lm total luminous flux

Status 08.12.2020

Technical amendments and errors reserved.

PROLED ®

MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany

Phone +49.821.60099-0 | Fax +49.821.60099-99

info@proled.com | proled.com