
OPTOTRONIC OT DMX RGB DIM | Dimmers for LED modules



Product benefits

- Intelligent electronic constant-voltage 3-channel DMX dimmer
- Constant-current dimmer with strain relief for separate installation

Product features

- Three output channels, can be controlled individually via DMX
- Addressing via rotary switches
- Maximum operating output voltage: 2 A per channel
- Control via DMX interface by means of DMX control units
- Reversible protection mechanisms for short-circuits, overtemperature and -loads


Technical data

Electrical data

System wattage	144 W
Nominal voltage	10...24 V
Output power	144 W

Dimensions & weight

Length	172.0 mm
Width	42.0 mm
Height	20.0 mm

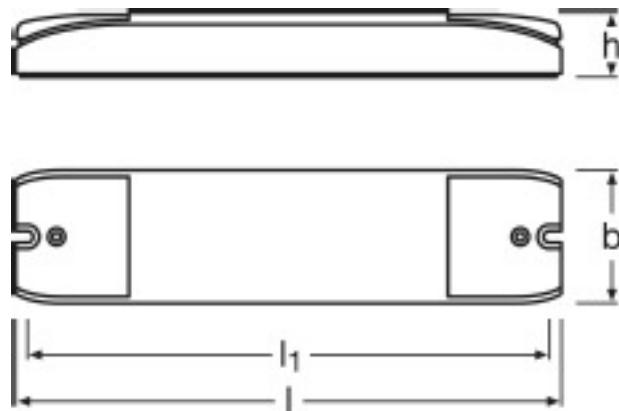

Product line drawing with letters

Temperatures

Ambient temperature range	-20...+50 °C
---------------------------	--------------

Capabilities

Dimming interface	DMX
Type of installation	Luminaire integration/Ceiling integration
Number of control outputs	3

Certificates & standards

Type of protection	IP20
---------------------------	------

Logistical Data

Product code	Packaging unit (Pieces/Unit)	Dimensions (height x width x length)	Gross weight	Volume
4008321160829	Unpacked 1	- x - x -	87.20 g	
4008321160836	Shipping carton box 20	222 mm x 76 mm x 351 mm	1840.00 g	5.92 dm ³



Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.