



DATASHEET

POWER BOX 2 x 86W

Compatible with:
PB15 PixelBrick, FP1 Titan Tube, FP2 Helios Tube,
FP3 Hyperion Tube

Date: 01/28/21 Version: 1.0



Charge or install 8 PixelBricks. Also allows wired data transfer from DMX, Artnet and sACN sources. Comes with PowerCon AC cable and 8 short DC charging cables. Longer Power/Data Combination cables sold separately.

Accessories

Power Data Combination Cables

5m: PWB-CAB-5


10m: PWB-CAB-10

15m: PWB-CAB-15

SPECIFICATIONS

Order Code EU	PWB-2-86-EU
Order Code US	PWB-2-86-US
Order Code UK	PWB-2-86-UK
Order Code CH	PWB-2-86-Ch
Order Code AU	PWB-2-86-AU
Input	100-240VAC, 50/60Hz
Input Current	1.8A/115VAC, 1A/230VAC
Output	2 x 24V / 2 x 86W
Output Connectors	2x DC Barrel 5.5/2.1mm
Power IN / Power OUT	PowerCon True1
Data Input	XLR-DMX; ART-Net (1 Universe); sACN (1 Universe) IP Address can be selected between 2.x, 10.x and DHCP. Universe ID can be set by web-interface or pushbutton (by button only 1-16).
Data Output	DMX via DC sockets
Data sockets	5-pin XLR in+out; RJ45 input
IP Rating	IP65
Dimensions (mm/inch)	160 x 122 x 50 / 6.3 x 4.8 x 2
Weight (kg/lbs)	1.5 / 3.3
Housing Material	Aluminium

DRAWINGS

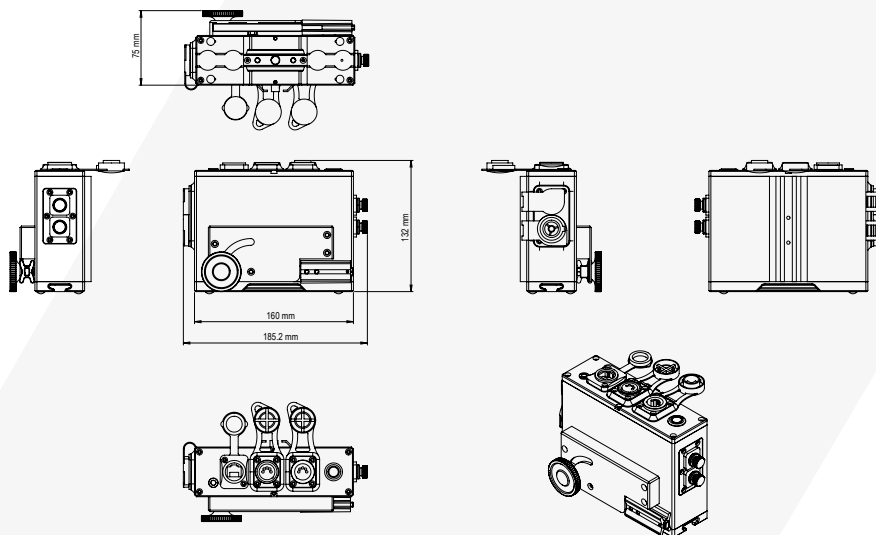

USE CASE

PowerBox in the set



CHARGING & CONNECTING

