



Sparxtar II infosheet.

Release info package

Refined to spark things up.

The Sparxtar II is an extremely reliable DMX controlled spark machine, with a voluminous effect up to 5 meters high!

Besides its compact design, the Sparxtar II is built with a high-quality heater, meets the highest safety standards and performs consistently.

The height of the effect is adjustable, making it perfect for all sizes of events. Every detail refined, so it's finally time to spark things up.



Get the highlights.

Built to perform.

Extensively tested and re-engineered, the Sparxtar II is designed for consistent performance. Built with the safety standards you expect from MAGIC FX.

Built to last, show after show.

The 150-gram hopper delivers up to 6 minutes of full effect, plenty to power through even the busiest set.

Bigger sparks, faster response.

Control your spark height anywhere between 2 and 5 meters. With a fast cut-off, the Sparxtar II fires and stops exactly on cue, giving you precise, split-second control over every effect.

Tilt with precision.

The Sparxtar II tilts from -15° to 45° side-to-side, and up to 15° forward, giving precise control over the spark angle on set.

Built to carry.

Lightweight and equipped with a collapsible carry handle, the Sparxtar II is easy to lift and carry. Quick to set up on site, and its compact housing fits seamlessly into any rig.



Built for control.

Self-closing fill cap.

Open, fill, release. The spring does the rest. No extra step, nothing to forget.

Status at a glance.

A built-in digital display gives operators instant insight into DMX addressing and machine status.

MAGICFX



Consumables & Accessories.



Sparxtar powder (100g).

4-5 minutes of full effect per bag.

MAGICFX



Flightcase.


A dedicated Sparxtar II flightcase is available as an accessory, engineered for safe transport and long-term durability. Designed to hold up to four Sparxtar II units, it also provides space for a box of Sparxtar powder and essential cables.

Product specifications.

MAGICFX

Technical details			
Product	Product name	Sparxtar II	
	Product code	MFX5003	
	Product type	Spark FX	
Main dimensions	Length	233 mm	9.2 in
	Width	226 mm	8.9 in
	Height	254 mm	10 in
Weights	Weight	9,5 kg	20.9 lb.
Electrical	Voltage input	210 - 240 VAC	
	Voltage frequency	50 / 60 Hz	
	Power consumption	700 W	
	Power connector	Neutrik powerCON TRUE1	
Controlling	Control options	DMX	
	Control protocols	DMX512-A	
		RDM	
Consumables	Consumable	MAGIC FX Sparxtar Powder	
	Consumption	Up to 25g / min	
	Output	Up to 5 m	
	Capacity	150 g Sparxtar Powder	



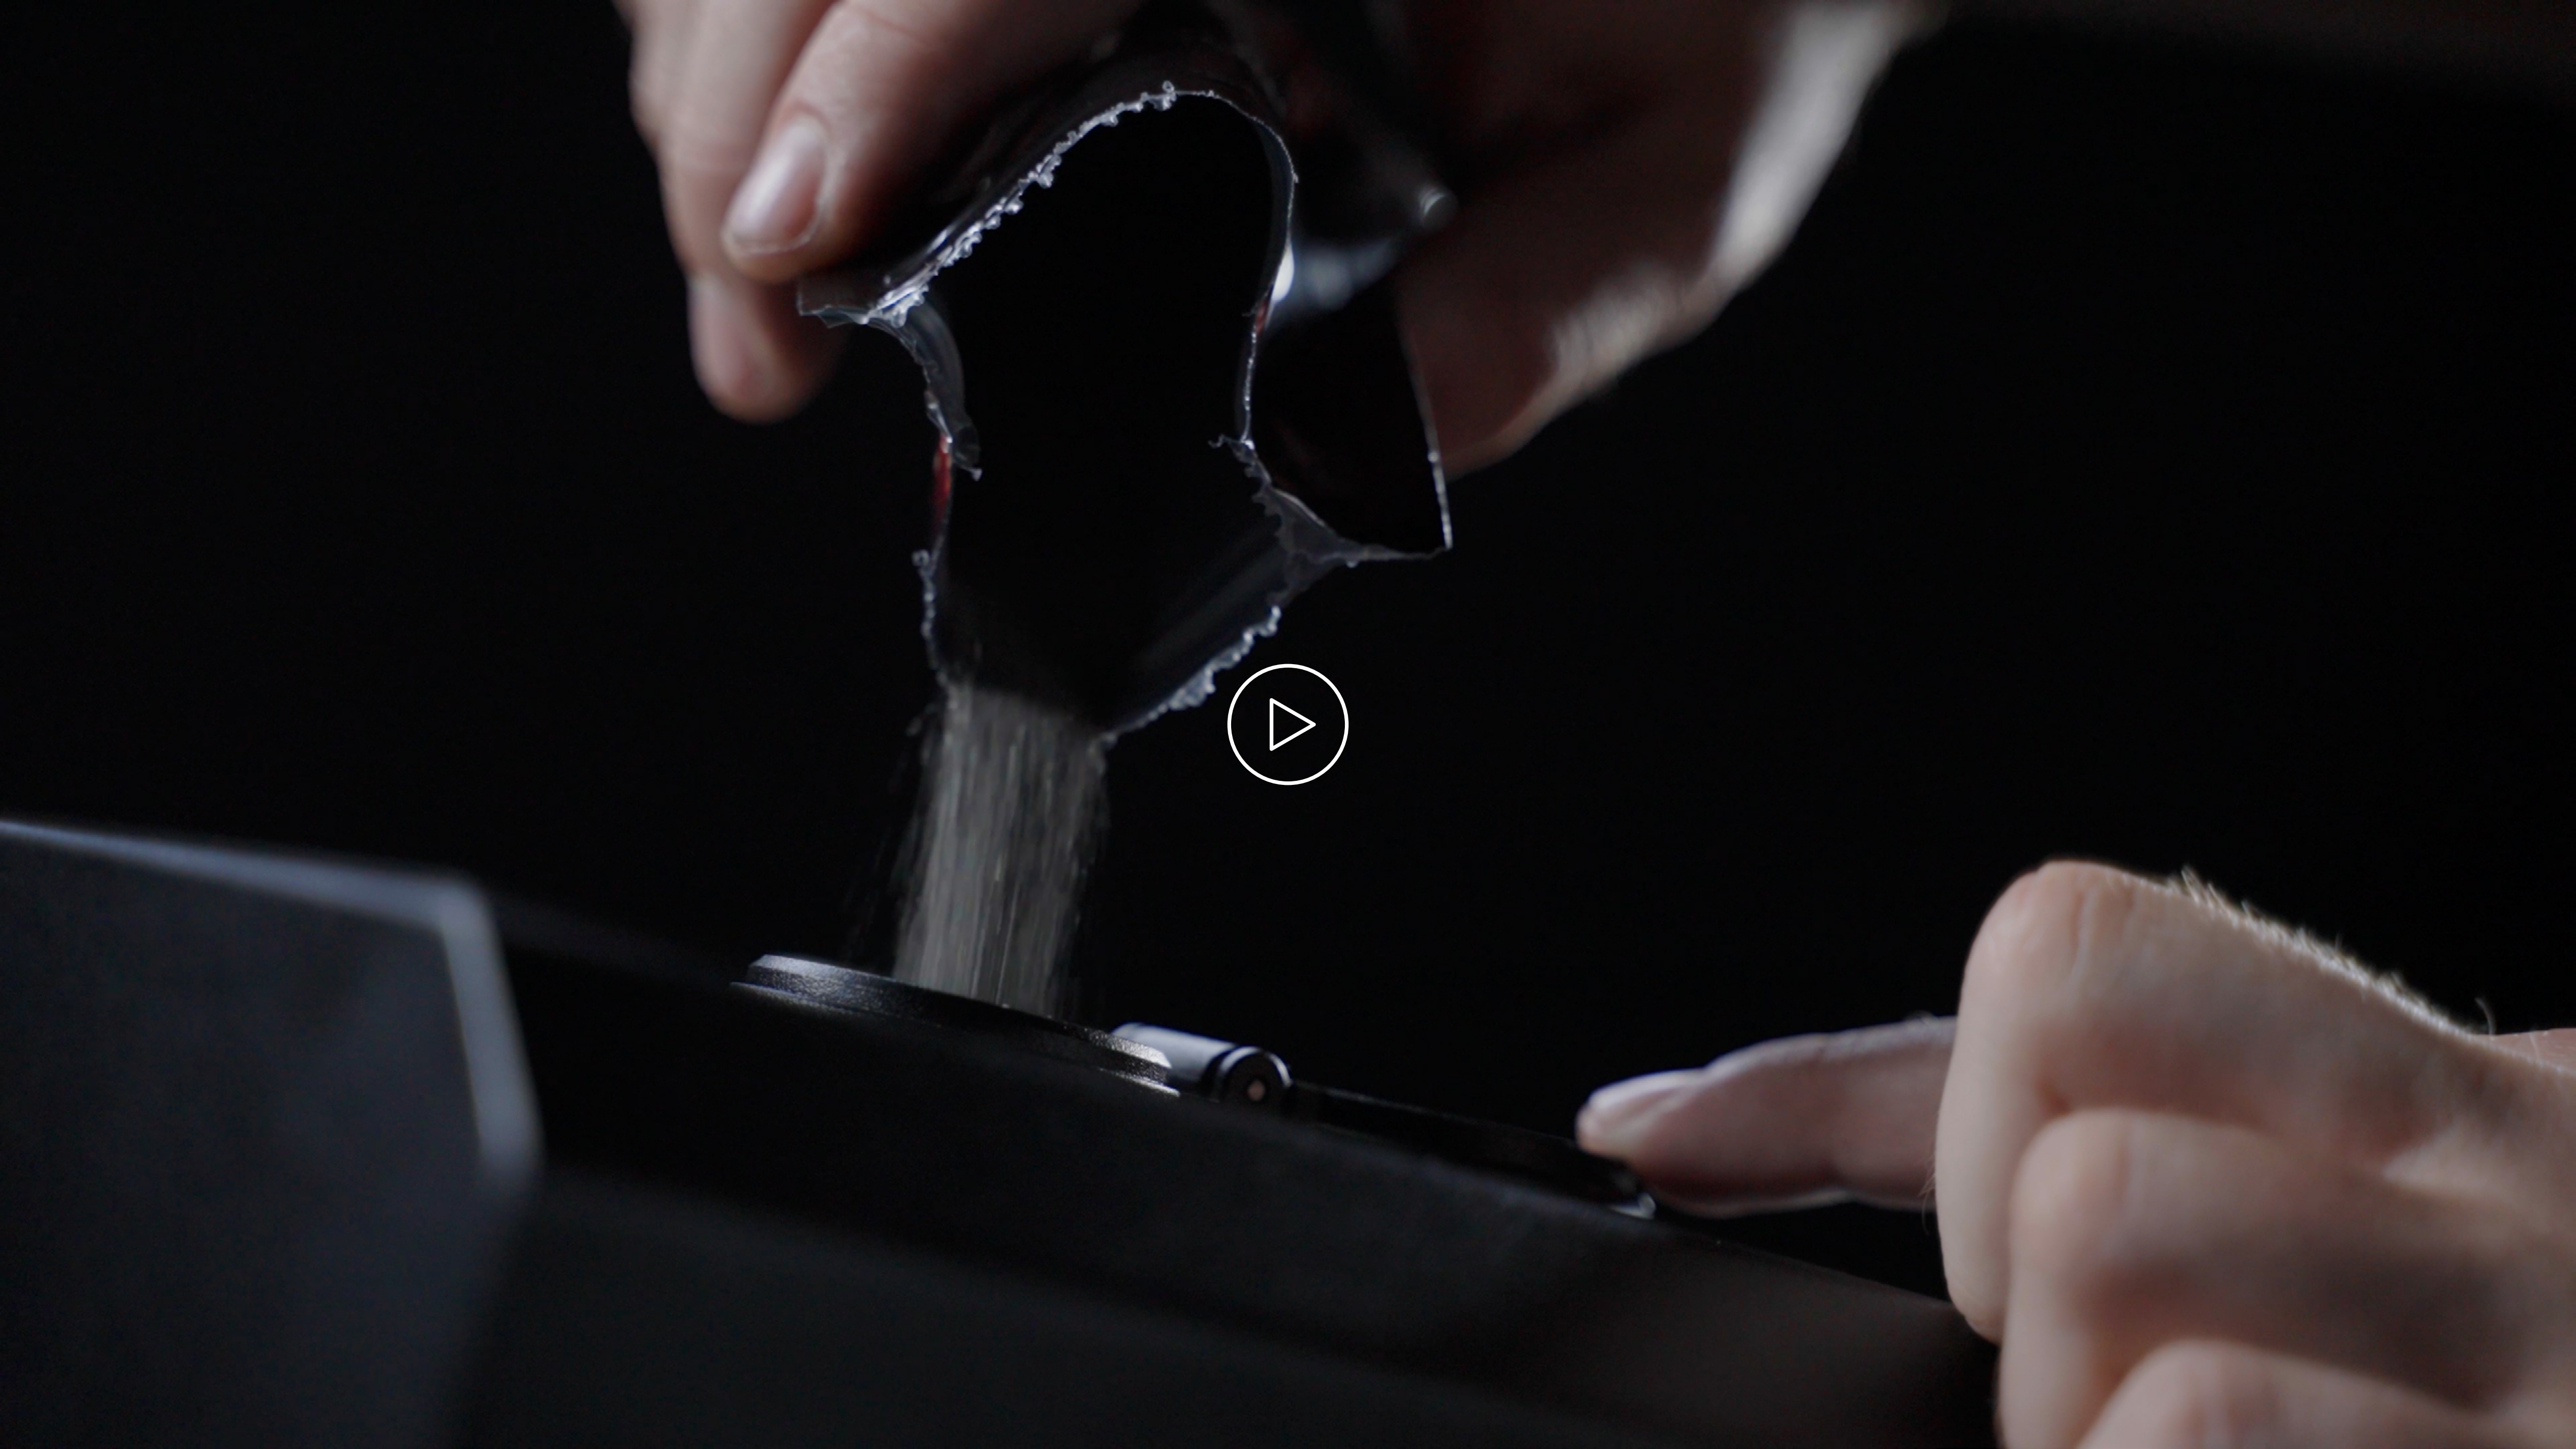

MAGICFX