


RG11 HDTV DIGITAL COAXIAL VIDEO CABLE

CVS LKRG11DSHF

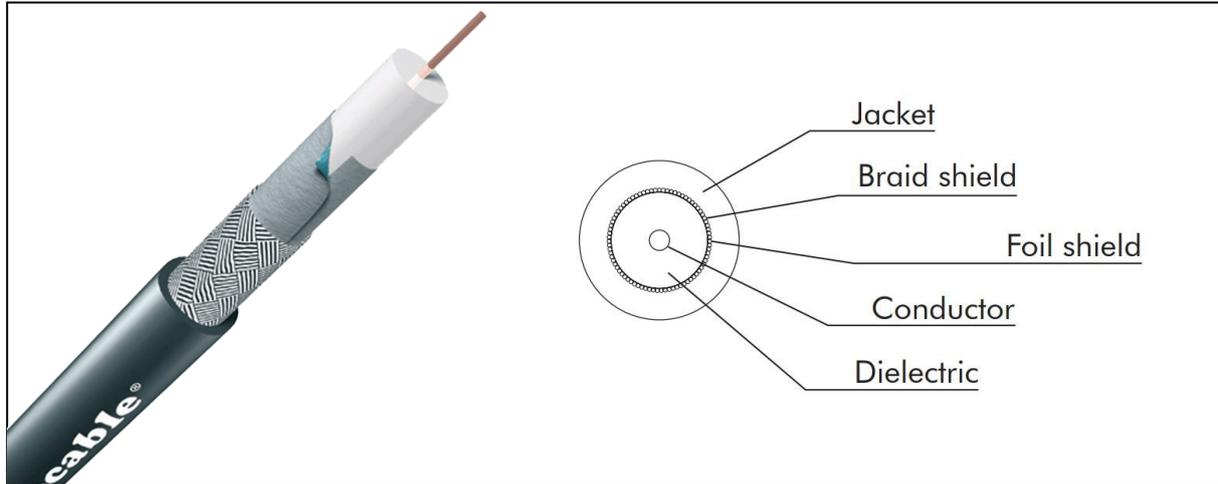

CVS LKRG11DSHF		
ELECTRICAL DATA		
D.C.R. at 20°C	Conductor	10 ohm/km
	Shield	8 ohm/km
Capacitance		-
Nominal Impedance		75 ohm
Attenuation db/100 m - MHz		0.8 at 5 / 2.8 at 50 / 5.9 at 200 / 8.9 at 470 / 12.1 at 800 / 13.5 at 1000 / 17.4 at 1500 / 21.1 at 2150 / 24.0 at 2750 / 25.4 at 3000
Vel. of Prop.		84%
GENERAL DATA		
Cable	O.D.	10.10 mm
	Standard reels	500 m
	Weight Kg/100m	9,06
	Operating temperature	-30°C/+70°C
Jacket	Material	LSZH Thermoplastic
	Nominal Thickness	1.10 mm
Shield	Material	First: Aluminium - Polyester - Aluminium Material foil - Second: Tinned copper braid
	Coverage	First: 100% - Second: 96%
Conductor	Quantity	1
	Strand	1 x 1.65 mm
	Area/AWG	5.20 mm ² /10
	Dielectric O.D.	7.20 mm
	Material	Red copper, foamed polyethylene insulated