


TRIAX CAMERA CABLES

CVS LKTRIAX**

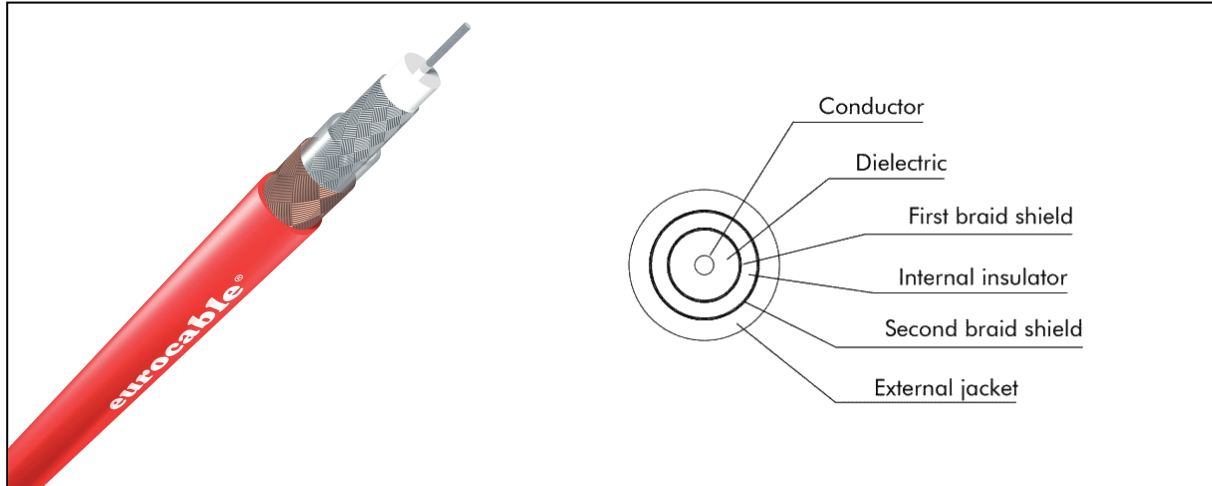

CVS LKCode		TRIAX08	TRIAX11
ELECTRICAL DATA			
D.C.R. at 20°C	Conductor	< 22.40 ohm/km	< 11.50 ohm/km
	Shield	First	< 8.50 ohm/km
		Second	< 7.80 ohm/km
Capacitance		55 pF/m	
Nominal Impedance		75 ohm	
Attenuation db/100 m - MHz		1.0 at 1 / 2.0 at 5 / 2.8 at 10 / 4.0 at 20 / 5.8 at 40 / 6.4 at 50 / 7.1 at 60 / 9.1 at 100	0.6 at 1 / 1.4 at 5 / 2.0 at 10 / 2.8 at 20 / 4.0 at 40 / 4.6 at 50 / 5.0 at 60 / 6.5 at 100
Vel. of Prop.		80%	
Inductance		30 µH/100 m	
GENERAL DATA			
Cable	O.D.	8.30 mm	10.90 mm
	Standard reels	1000 m	
	Weight Kg/100m	10,50	17,80
	Operating temperature	-20°C/+70°C	
Jacket	Material	PVC TM2	
	Nominal Thickness	0.55 mm	1.00 mm
Shield	Material	First: Silver plated braid shield Second: Bare copper braid shield	
	Coverage	First: 90% - Second: 90%	
Conductor	Quantity	1	
	Strand	1 x 1.00 mm	1 x 1.40 mm
	Area/AWG	0.78 mm ² /18	1.50 mm ² /16
	Dielectric O.D.	4.50 mm	6.30 mm
	Material	Silvered solid copper foamed, polyolefine insulated	