


Article name: Flex Strip 600-95 Mono - UWW

Article number: L66936

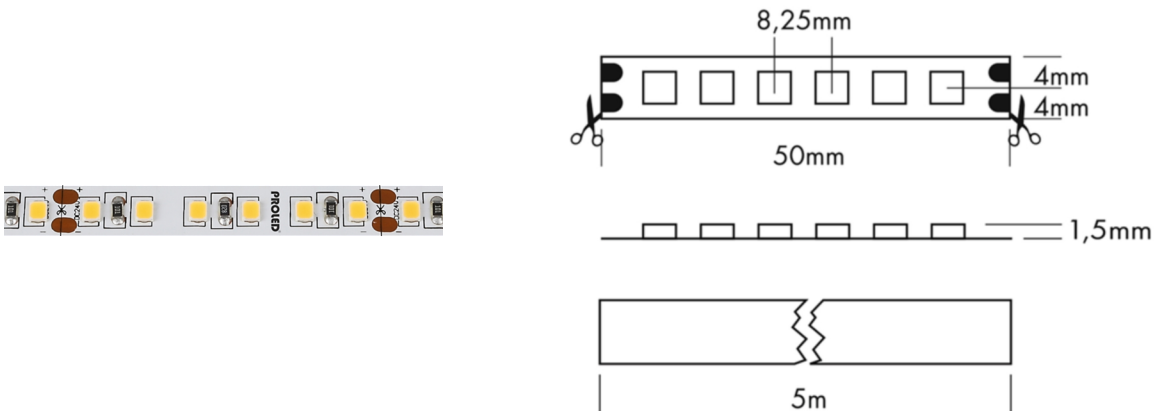

Article description:

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities.

- High flexibility - adaptable to round shapes.
- Installation with 3M adhesive tape on the strip's backside (self adhesive).
- dimmable and controllable via DMX 512, DALI, KNX, 1-10V, CASAMBI, RF by MULTI power supplies/controller

Technical:



Mounting type:	Surface-mounted on ceiling	Electric:	
Adjustability:	Fixed	System power:	9.6 W
Controllability:	Dimmable	Current:	24 V
Safety:	IP20	Safety class:	3
Temperature range:	-10...45 °C	EEL:	A++ - A
Lifetime:	50.000 h at L80B10	UGR:	31.06

Shape and dimensions:

Length:	1000 mm
Width:	8 mm
Height:	2 mm
Weight:	-

Light output 1 (LED 2400K - CRI 95):

Lamp type:	LED
Lamp power:	9.6 W
Total luminous flux:	720 lm
Light efficiency:	75 lm/W
CCT:	2400 K
CRI:	95
Light distribution:	(Symmetrical) Wide flood (half value angle 45° ... 125°)

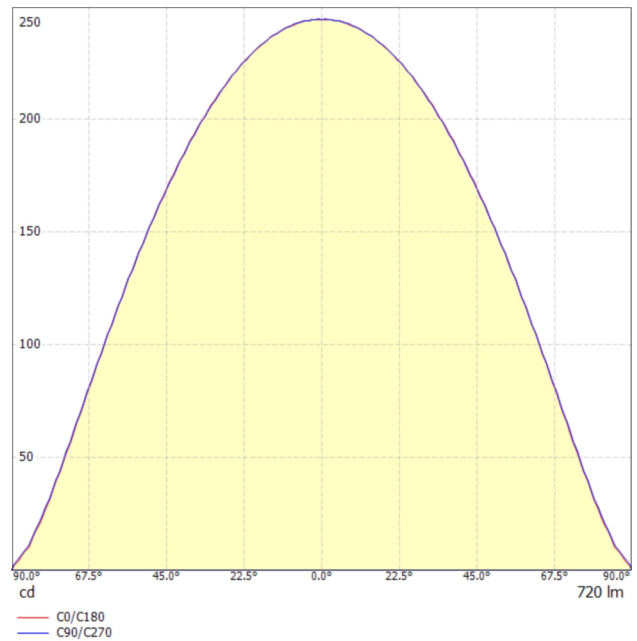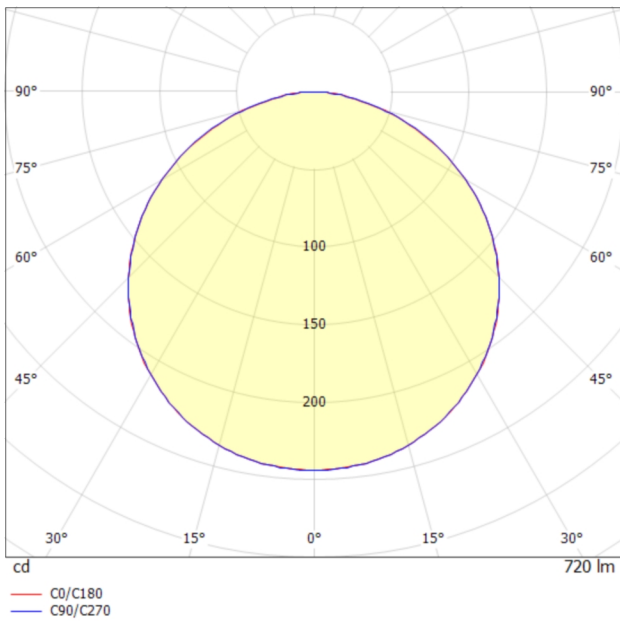

Data sheet

L66936 - Flex Strip 600-95 Mono - UWW



0.5	1.58	E(0°) E(C0)	57.7°	887 68
1.0	3.16	E(0°) E(C0)	57.7°	222 17
1.5	4.75	E(0°) E(C0)	57.7°	99 8
2.0	6.33	E(0°) E(C0)	57.7°	55 4
2.5	7.91	E(0°) E(C0)	57.7°	35 3
3.0	9.49	E(0°) E(C0)	57.7°	25 2

Distance Cone diameter Illuminance

— C0/C180 (Half-peak divergence: 115.4°)

Glare evaluation according to UGR

p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20

Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
		2H	2H	27.2	28.5	27.5	28.8	29.0	27.2	28.5	27.5
2H	3H	28.8	30.0	29.1	30.3	30.5	28.8	30.0	29.1	30.3	30.5
2H	4H	29.4	30.5	29.7	30.8	31.1	29.4	30.5	29.7	30.8	31.1
2H	6H	29.8	30.8	30.1	31.1	31.5	29.8	30.9	30.2	31.2	31.5
2H	8H	29.9	30.9	30.3	31.2	31.6	29.9	31.0	30.3	31.3	31.6
2H	12H	30.0	30.9	30.3	31.3	31.6	30.0	31.0	30.4	31.3	31.7
4H	2H	27.9	29.0	28.3	29.3	29.6	27.9	29.0	28.3	29.3	29.6
4H	3H	29.6	30.6	30.0	31.0	31.3	29.7	30.6	30.0	31.0	31.3
4H	4H	30.4	31.2	30.8	31.6	32.0	30.4	31.3	30.8	31.6	32.0
4H	6H	30.9	31.6	31.3	32.0	32.4	30.9	31.7	31.4	32.1	32.5
4H	8H	31.1	31.8	31.5	32.2	32.6	31.1	31.8	31.6	32.2	32.6
4H	12H	31.2	31.8	31.6	32.2	32.6	31.2	31.8	31.7	32.3	32.7
8H	4H	30.7	31.4	31.1	31.8	32.2	30.7	31.4	31.1	31.8	32.2
8H	6H	31.3	31.9	31.8	32.3	32.8	31.3	31.9	31.8	32.3	32.8
8H	8H	31.6	32.0	32.0	32.5	33.0	31.6	32.1	32.1	32.5	33.0
8H	12H	31.7	32.1	32.2	32.6	33.1	31.8	32.2	32.3	32.7	33.2
12H	4H	30.7	31.3	31.1	31.7	32.2	30.7	31.3	31.2	31.7	32.2
12H	6H	31.4	31.9	31.9	32.3	32.8	31.4	31.9	31.9	32.4	32.8
12H	8H	31.6	32.1	32.1	32.5	33.0	31.7	32.1	32.2	32.6	33.1

Variation of the observer position for the luminaire distances S		
S = 1.0H	+0.1 / -0.1	+0.1 / -0.1
S = 1.5H	+0.2 / -0.3	+0.2 / -0.3
S = 2.0H	+0.4 / -0.7	+0.4 / -0.7

Standard table	BK06	BK06
Correction summand	14.4	14.5

Correction glare indices referring to 720lm total luminous flux