


SINGLE PAIR POWERED DMX CABLE

CVS LKDMX CC

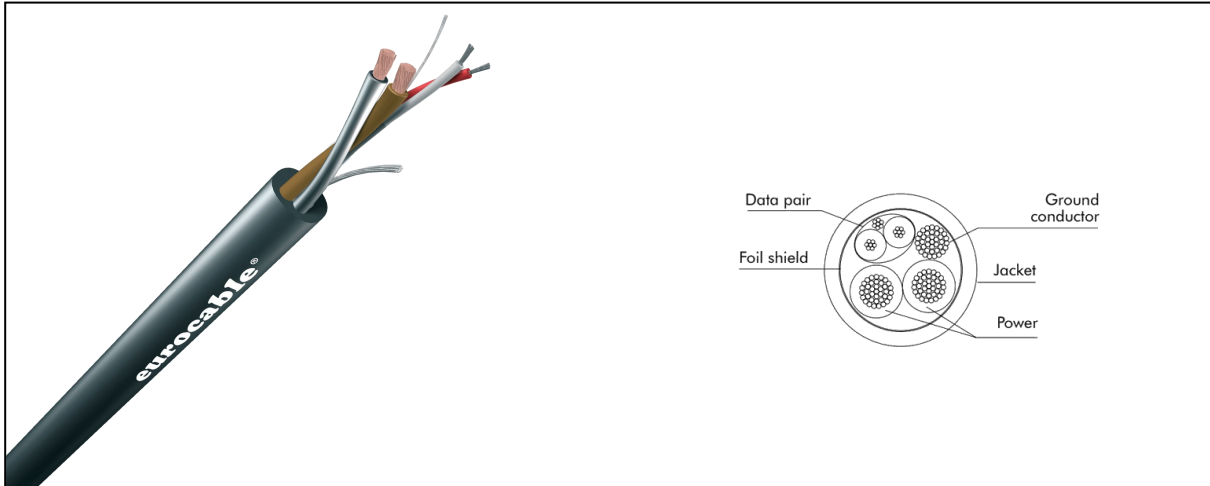

CVS LKDMXCC		
ELECTRICAL DATA		
Description		DMX 512 w/color change power supply
D.C.R.	Conductor	Data: 80 ohm/km - Power: 10 ohm/km
	Shield	150 ohm/km
Capacitance 1 KHz	Cond/Cond	33 pF/m
	Cond/Shield	82 pF/m
Nominal Impedance		110 ohm
Attenuation	256 KHz	2 db/100 m
Vel. of Prop.		78%
Inductance		55 μH/100 m
GENERAL DATA		
Cable	O.D.	7.80 mm
	Standard reels	200 m
	Weight Kg/100m	11.50
	Op. temp.	-20° C/+70° C
Jacket	Material	PVC flame resistant
	Nom.I Thick.	0.70 mm
Shield	Material	First: Aluminium - Mylar foil
	Coverage	100%
Conductor	Quantity	Data: 1 - Power: 2
	Strand	Data: 7 x 0.20 - Power: 43 x 0.25 mm
	Area/AWG	Data: 0.22 mm ² /24 Power: 2 mm ² /14
	Ins. O.D.	Data: 1.60 mm - Power: 2.70 mm
	Material	Data: Tinned copper P.E. insulated Power: Tinned copper PVC insulated