

PAR30S 18.5W



OUTPUT RANGE: VIVID SERIES	930 - 1050 lumen
OUTPUT RANGE: BRILLIANT SERIES	1190 - 1280 lumen
BEAM ANGLE RANGE	9°, 25°, 36°, 60°
COLOR TEMPERATURE RANGE	2700K, 3000K, 4000K, 5000K
APPLICATION	Halogen replacement for indoor & outdoor applications



POINT SOURCE OPTICS

Exceptional beam control enables unique 9° narrow spot and smooth uniform beams

Single light source, single crisp shadow

VP₃ VIVID COLOR & VP₃ NATURAL WHITE

VIVID series provides accurate color rendering across the visible spectrum from 400nm to 700nm, with CRI/95*, R9/95*, Rf/90, Rg/100

Whiteness rendering matches or exceeds that of halogen and incandescent sources at 2700K and 3000K

ENERGY EFFICIENCY & LONG LIFE

85% more energy efficient than standard halogen lamps

Typical payback of one year or less

Rated lifetime of 35,000 hours. 3 year warranty

CERTIFICATIONS

RoHS, CE



HIGHLY COMPATIBLE

Narrow spot compatible with Soraa SNAP System accessories

Thermally and geometrically compatible with standard fixtures and suitable for damp locations

Works with trailing edge and leading edge phase cut dimmers (see www.soraa.com/resources)

INTENDED USE AND APPLICATIONS

Intended for use in PAR30S compatible recessed downlights, track lighting and other indoor and outdoor applications

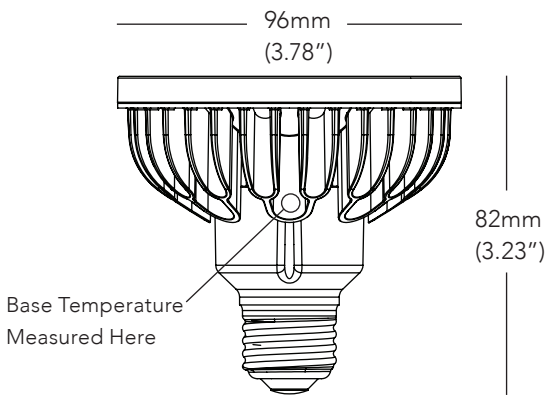
Soraa lamps are designed to safely turn down in any thermal environment not conducive to minimum airflow or proper ventilation

GENERAL SPECIFICATIONS

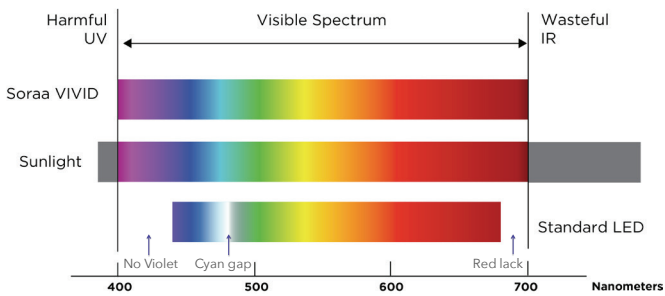
Form Factor	Operating Temperature	Electrical	Dimming and Flicker
Width: 96mm (3.78")	Minimum: -40°C (ambient)	Wattage: 18.5W	Dimmable to <20%
Height: 82mm (3.23")	Typical: 70°C - 80°C (base)	Power factor: 0.93	Flicker Index: <0.12
Weight: 274g	Maximum: 90°C (base)	Voltage: 230V +/- 23V	Percent Flicker: 45%
		Frequency: 50/60Hz	

*Metrics apply to 2700K, 3000K, 4000K. 5000K color metrics are CRI/90, R9/95

DIMENSIONS

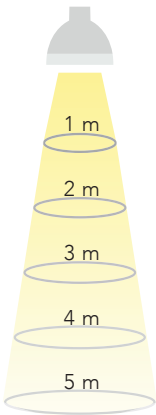


COLOR RENDERING



9 DEGREE BEAM

Beam Dia at 50% Intensity (m)	Field Dia at 10% Intensity (m)	Lux (% of Intensity)
0.2	0.3	77%
0.3	0.6	23%
0.5	0.8	11%
0.6	1.1	6%
0.8	1.4	4%

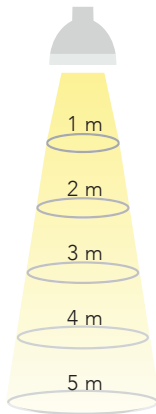


25 DEGREE BEAM

Beam Dia at 50% Intensity (m)	Field Dia at 10% Intensity (m)	Lux (% of Intensity)
0.4	0.7	77%
0.9	1.5	23%
1.3	2.2	11%
1.8	2.9	6%
2.2	3.6	4%

60 DEGREE BEAM

Beam Dia at 50% Intensity (m)	Field Dia at 10% Intensity (m)	Lux (% of Intensity)
0.6	1.2	77%
1.3	2.3	23%
1.9	3.5	11%
2.6	4.6	6%
3.2	5.8	4%



Beam Dia at 50% Intensity (m)	Field Dia at 10% Intensity (m)	Lux (% of Intensity)
1.2	2.0	77%
2.3	4.0	23%
3.5	6.0	11%
4.6	8.0	6%
5.8	10.0	4%













Note: Lux may be calculated by multiplying the peak Intensity of the desired model number by the percentage in the tables above







SPECIFICATIONS BY MODEL NUMBER* SORAA LED PAR30S 18.5W

Model #	Product Code	CCT (K)	Beam Angle	Field Angle	Peak Intensity	Total Flux (Lm)	Efficacy (Lm/W)	90° Lumens	McA	EEl	SNAP
VIVID SERIES											
SP30SW-18-09D-927-03-S3	02751	2700	9	16	17200	930	50	835	3	A	YES
SP30SW-18-25D-927-03-S3	02753	2700	25	40	5020	930	50	860	3	A	-
SP30SW-18-36D-927-03-S3	02755	2700	36	60	2320	930	50	855	3	A	-
SP30SW-18-60D-927-03-S3	02757	2700	60	90	1020	930	50	825	3	A	-
SP30SW-18-09D-930-03-S3	02767	3000	9	16	18500	1000	54	900	3	A	YES
SP30SW-18-25D-930-03-S3	02769	3000	25	40	5400	1000	54	930	3	A	-
SP30SW-18-36D-930-03-S3	02771	3000	36	60	2500	1000	54	920	3	A	-
SP30SW-18-60D-930-03-S3	02773	3000	60	90	1100	1000	54	890	3	A	-
SP30SW-18-09D-940-03-S3	02783	4000	9	16	19240	1040	56	935	4	A	YES
SP30SW-18-25D-940-03-S3	02785	4000	25	40	5600	1040	56	965	4	A	-
SP30SW-18-36D-940-03-S3	02787	4000	36	60	2600	1040	56	955	4	A	-
SP30SW-18-60D-940-03-S3	02789	4000	60	90	1140	1040	56	925	4	A	-
SP30SW-18-09D-950-03-S3	02791	5000	9	16	19420	1050	57	945	5	A	YES
SP30SW-18-25D-950-03-S3	02793	5000	25	40	5660	1050	57	975	5	A	-
SP30SW-18-36D-950-03-S3	02795	5000	36	60	2620	1050	57	965	5	A	-
SP30SW-18-60D-950-03-S3	02797	5000	60	90	1140	1050	57	930	5	A	-
BRILLIANT SERIES											
SP30SW-18-09D-827-03-S3	02759	2700	9	16	22000	1190	64	1070	3	A	YES
SP30SW-18-25D-827-03-S3	02761	2700	25	40	6420	1190	64	1105	3	A	-
SP30SW-18-36D-827-03-S3	02763	2700	36	60	2960	1190	64	1090	3	A	-
SP30SW-18-60D-827-03-S3	02765	2700	60	90	1300	1190	64	1055	3	A	-
SP30SW-18-09D-830-03-S3	02775	3000	9	16	23680	1280	69	1150	3	A	YES
SP30SW-18-25D-830-03-S3	02777	3000	25	40	6900	1280	69	1190	3	A	-
SP30SW-18-36D-830-03-S3	02779	3000	36	60	3200	1280	69	1175	3	A	-
SP30SW-18-60D-830-03-S3	02781	3000	60	90	1400	1280	69	1135	3	A	-

CCT: Correlated Color Temperature McA: White Point Accuracy in McA step SNAP: SORAA SNAP System Compatible EEl: Energy Efficiency Index

*Specifications are at stable warm operating conditions (25°C ambient)

SERIES/CCT	COLOR ACCURACY	WHITENESS INDEX	SPECTRAL POWER DISTRIBUTION
VIVID 2700K	 Rf: 90, Rg: 100, Rfh1: 95	 Rw: 120	 380 Wavelength (nm) 780 CRI: 95, R9: 95
VIVID 3000K	 Rf: 90, Rg: 100, Rfh1: 95	 Rw: 120	 380 Wavelength (nm) 780 CRI: 95, R9: 95
VIVID 4000K	 Rf: 90, Rg: 100, Rfh1: 95	 Rw: 70	 380 Wavelength (nm) 780 CRI: 92, R9: 95
VIVID 5000K	 Rf: 90, Rg: 100, Rfh1: 95	 Rw: 50	 380 Wavelength (nm) 780 CRI: 90, R9: 95

SERIES/CCT	COLOR ACCURACY	WHITENESS INDEX	SPECTRAL POWER DISTRIBUTION
BRILLIANT 2700K	 Rf: 85, Rg: 92, Rfh1: 77	 Rw: 100	 380 Wavelength (nm) 780 CRI: 85, R9: >0
BRILLIANT 3000K	 Rf: 85, Rg: 92, Rfh1: 77	 Rw: 100	 380 Wavelength (nm) 780 CRI: 85, R9: >0

Rf: TM-30 metric measuring color fidelity (whether colors are similar to those under natural light). Rf is a more accurate version of the CRI Ra. Rf is 100 for natural light.

Rg: TM-30 metric measuring color gamut (whether colors are more saturated than under natural light). Rg is 100 for natural light.

Rfh1: TM-30 metric measuring color fidelity for red tones. Rf is a more accurate version of the CRI R9. Rfh1 is 100 for natural light.

Rw: Soraa-developed metric to measure white fidelity. Rw measures the magnitude of excitation of whitening agents within whites. Rw is about 100 for natural light.