


Lupo
Made in Italy

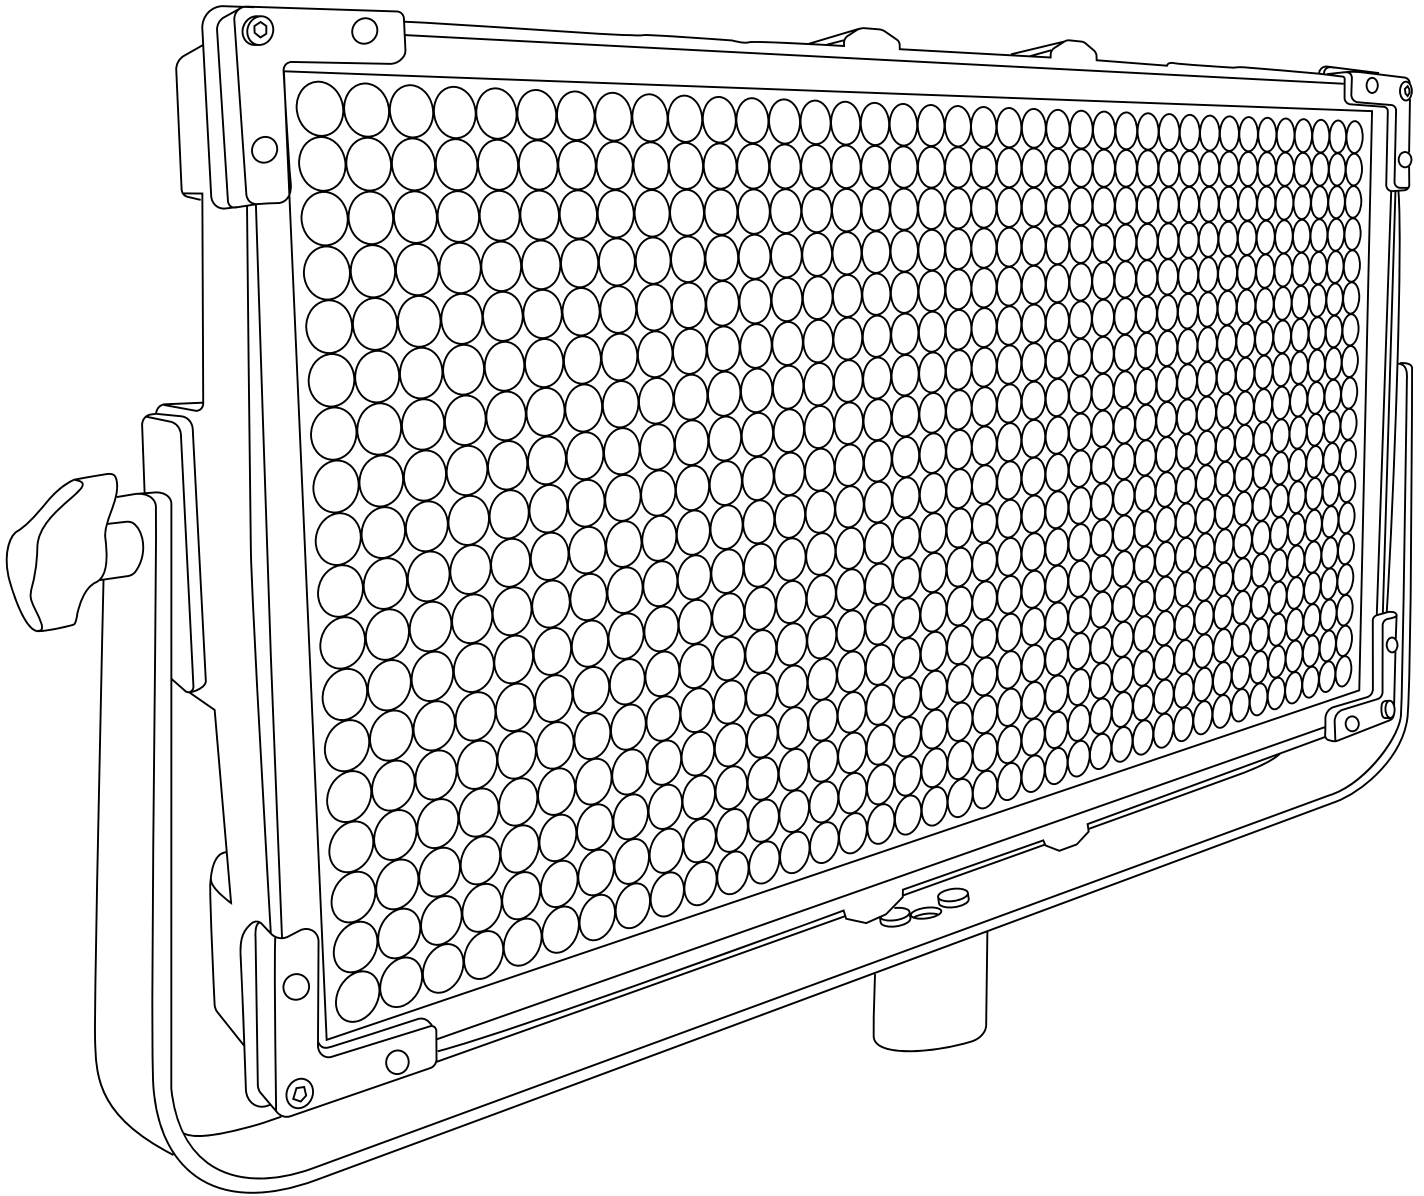

Cod 503 PRO

HyperpanelPRO





Dual Color 60 Hard

Technical Data

Dimensions (cm)	691 x 465 x 121 mm
Dimensions (in)	27.2 x 18.3 x 4.21 in
Weight (kg)	9 kg
Weight (lb)	19.8 lb
CRI (Colour Rendering Index)	95
TLCI (Television Lighting Consistency Index)	96
Estimated LED lifetime (L80)	50,000 hours
Dimmer 0 - 100	included
Dimming curves mode	Linear, Exponential, Logarithmic
DMX module	included
DMX (bit)	8 bit / 16 bit
Connection for 14.8 V battery with standard XLR 4 pin connector (pin 1: negative / pin 4: positive)	included
Standard XLR 5 pin connectors to DMX console	included
Watt consumption	560 W
Firmware upgrades	through USB port
Colour temperature	2800 K - 6500 K
Voltage AC	90 V - 240 V
Voltage DC	24 V
Light beam	40°
Frequency (input)	50 / 60 Hz
Compliance	CE
Remote control	Bluetooth Long Range / DMX / RDM
Ambient temperature	Max: + 45°C / Min: - 10°C
Power factor	0.9

Photometric data	6500 K	5600 K	3200 K
Distance			
Lux at 1 m - 3.2 ft	200000	196000	190000
Lux at 2 m - 6.5 ft	53000	51000	48000
Lux at 3 m - 9.8 ft	23000	22000	21000
Lux at 4 m - 13.1 ft	13100	12600	11600
Lux at 5 m - 16.4 ft	8300	8200	8000

Technical Drawing

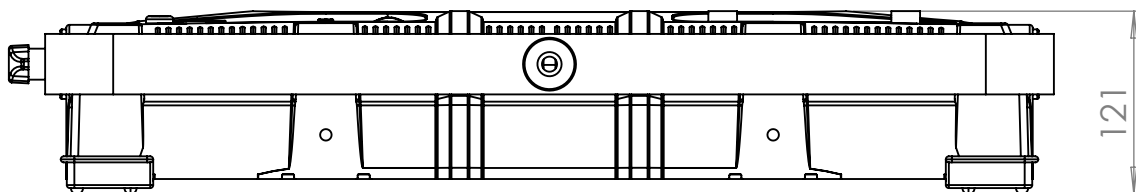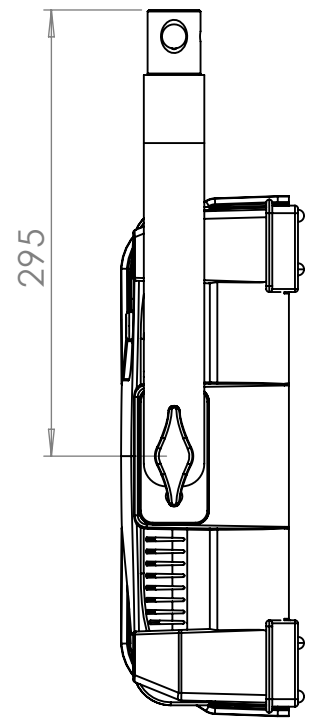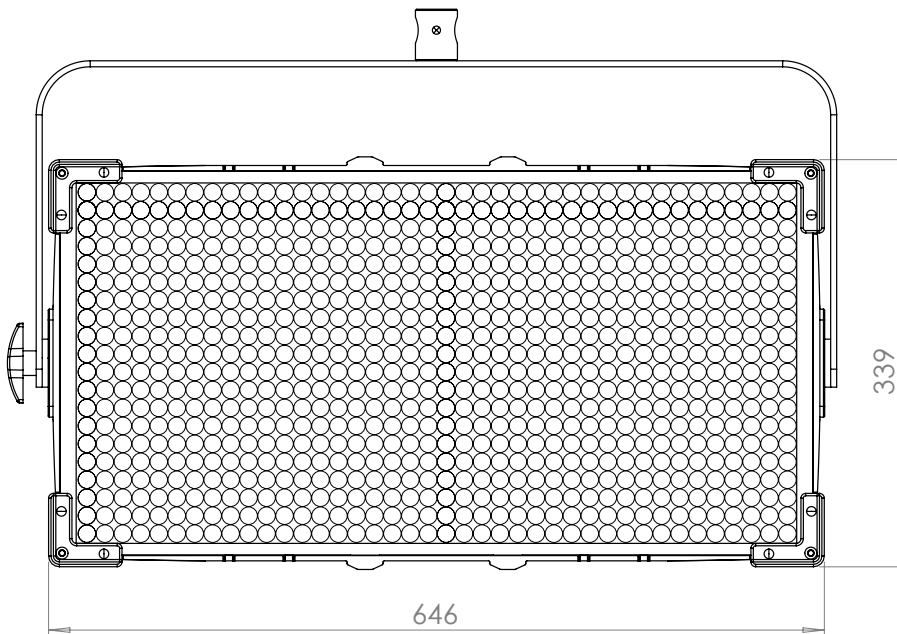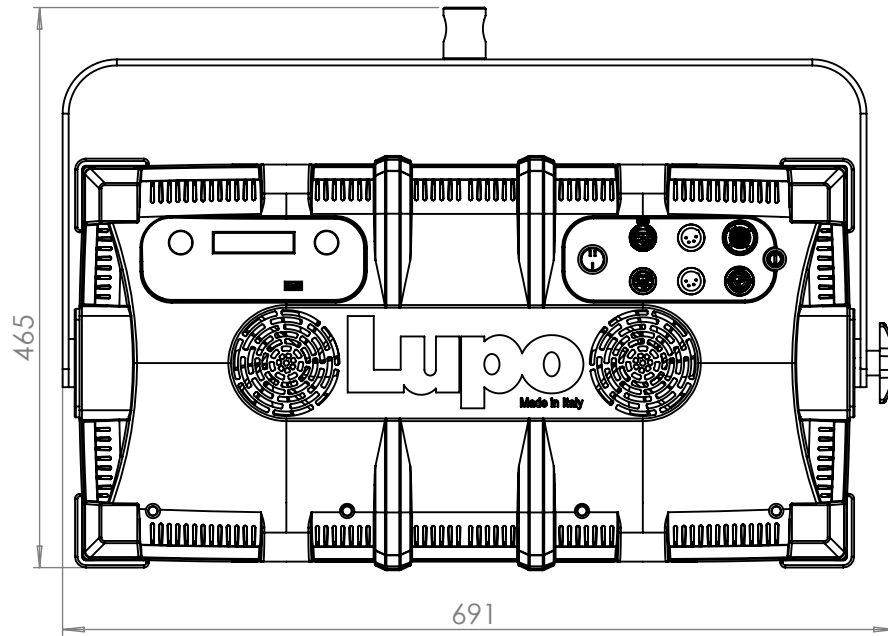

Pole Operated Yoke

